



Acinox
HYGIENIC SOLUTIONS



Product Catalog



About Us ?

Since 2003, we have been experts in hygiene solutions and equipment for food, cosmetics, and pharmaceutical environments, as well as local authorities. We are based in Geneston (44) and work mainly with French partners and manufacturers. Our team consists of about fifteen employees, all focused on customer satisfaction. Since 2019, Acinox has joined the Velec group and is now present internationally.

Expertise in food, pharmaceutical, and cosmetics industries



Our goal: to enable our clients to increase their production capacity by securing and optimizing their hygiene, both for floors and personnel.

Thanks to our collaboration with EHEDG (European Hygienic Engineering & Design Group), we place Hygienic Design and engineering at the heart of our priorities, while ensuring the ergonomics of our products are optimized.

Solutions for building economists and engineering firms

Our experts work alongside you to offer tailor-made solutions, advise you, and respond to your projects.

Our Expertise



MAINTENANCE
AND HYGIENE OF
MATERIALS



INNOVATION



DESIGNED AND
MANUFACTURED IN
FRANCE



INSTALLATION
ASSISTANCE



PRESERVATION OF
THE ENVIRONMENT




PREVENTIVE
MAINTENANCE

Products available for online ordering

Order your siphons, hand wash basins, Vikan industrial brushes, or your bin bag holders with simple and secure payment by credit card or bank transfer, and receive your Acinox products directly where you need them.

Need a custom product? You can also request a quote online: we remain at your disposal to meet your specific needs.

Our commitment to a sustainable future

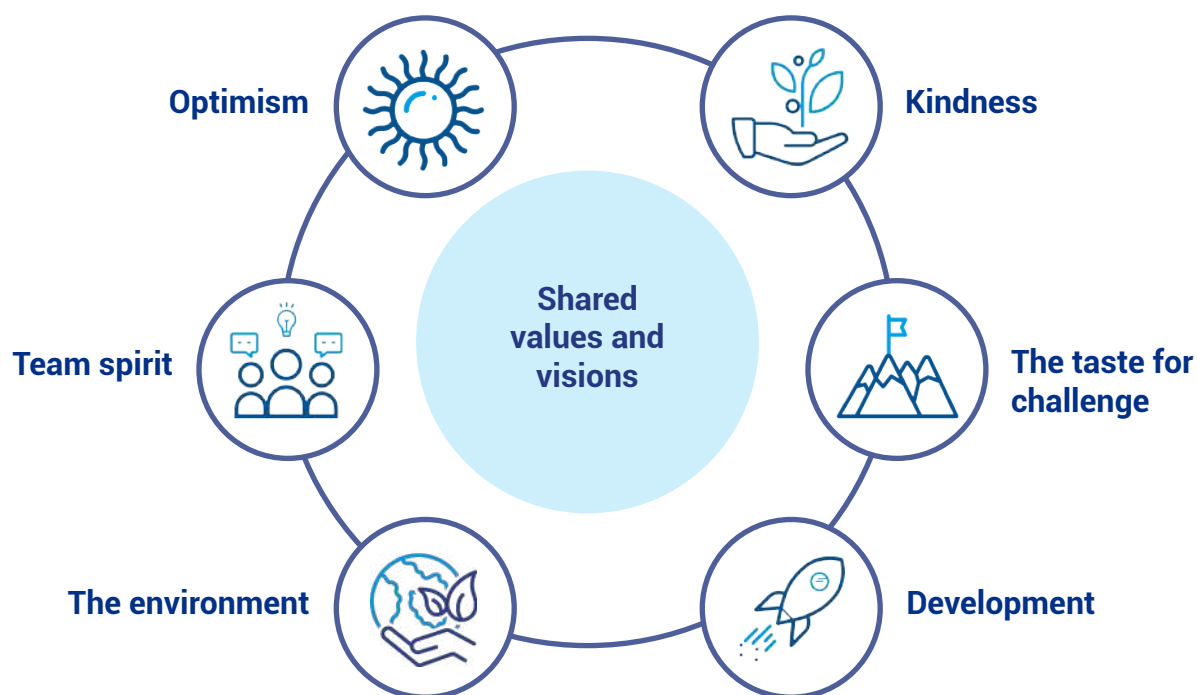

Acinox: a strong commitment to the environment

At Acinox, preserving the environment is not an option, it is a priority. We design our products using eco-responsible manufacturing processes that limit their impact on the planet, such as zero discharge, material recycling, and optimized management of water and disinfectant products.

All our products undergo strictly controlled descaling & passivation treatments. These industrial processes, subject to prefectural authorization, are monitored daily by our specialized technicians to ensure minimal environmental impact.

Finally, we work only with suppliers who share our values and are committed to eco-responsible practices. Together, we help build a more sustainable future.

Our strengths



Hygienic Design

- No hollow bodies: no retention zones
- Microblasting or electropolishing finish
- 100% stainless steel solution (gears, sensors, ...)
- Welds made under gas protection (TIG process), with a smooth and discreet finish.
- No porosity, no bacterial proliferation



Innovation

- We are the only ones to handle the disinfection of dry zones in Europe
- 1 patented device, exclusive worldwide
- 1 ultra-compact device, the smallest on the market
- 1 unique detection and reporting device



Simplicity:

- Audit of your sites
- Technical recommendation based on your ideal hygiene processes
- Installation, commissioning and training
- Maintenance contract
- Technical hotline




Reliability:

- Average equipment lifespan of 20 years
- Renowned clients, happy to share the improvements in their production

A precise, personalized, and immersive study

Our research and development experts support you throughout your hygiene airlock project: advice on layout and choosing equipment suited to your processes and premises. Creation of 3D plans and realistic renderings, with the possibility of using a virtual reality headset to help you visualize your project. These tools facilitate communication with your teams to choose your equipment with complete peace of mind.

- | | | | |
|---------------------|-------------------------------|---|---------------------------|
| 1 SOLE WASHER | 6 CRATE WASHING TUNNEL | 11 SOAKING TRAY | 16 STAINLESS STEEL TABLE |
| 2 TURNTABLE | 7 APRON WASHER | 12 HYGIENIC BRUSHING AND DISINFECTION AIRLOCK | 17 SINK |
| 3 EUROPE BIN TILTER | 8 AIRLOCK COMPACT | 13 HANDWASH BASIN DYSON | 18 STAINLESS STEEL BENCH |
| 4 EUROBIN | 9 KNEE CONTROL HANDWASH BASIN | 14 HMI TRIPOD | 19 BOOT DRYER |
| 5 LIFTER-TILTER | 10 BOOT WASHER | 15 SANYPASS | 20 STAINLESS STEEL LOCKER |

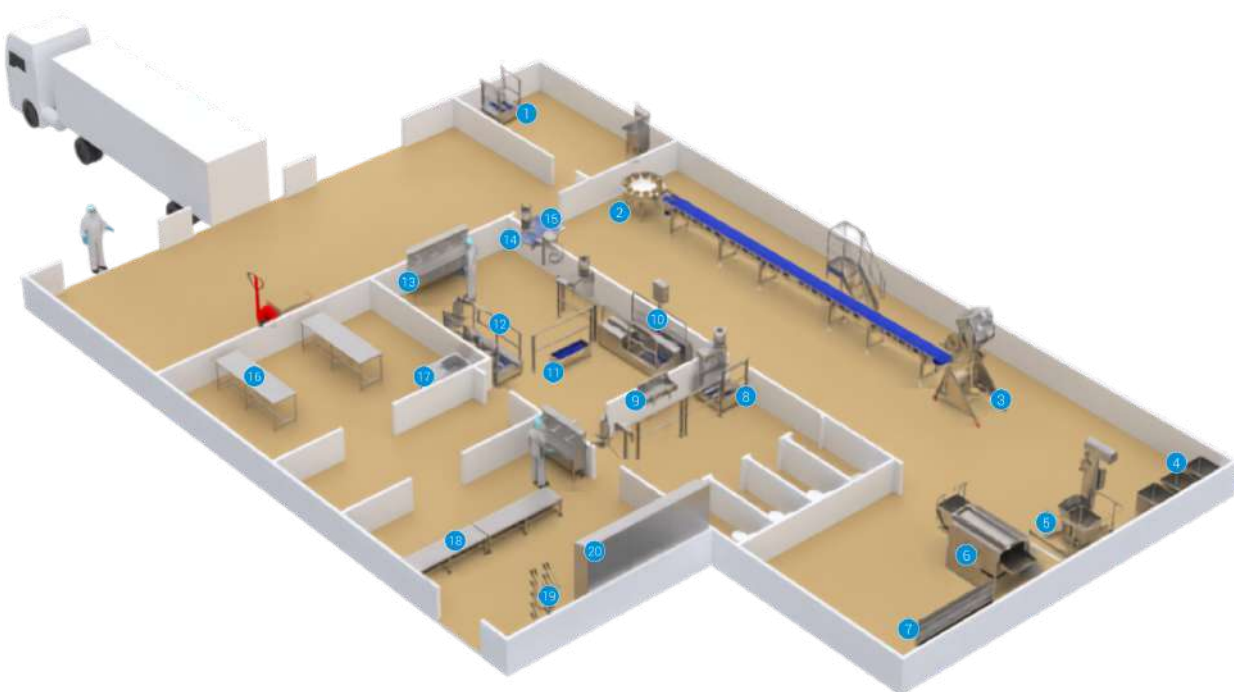

Maintenance contracts



Our maintenance contracts guarantee the proper functioning and hygienic reliability of your devices while extending their lifespan by 20%.

You can subscribe to this service for the following ranges: Hygiene equipment, Handling & lifting.

Our goal: your satisfaction!




**RELIEVE YOUR TEAM
FROM
MAINTENANCE**



**EXTEND THE LIFESPAN
OF EQUIPMENT**



CONTROL YOUR COSTS



**SECURE ACCESS TO THE
ROOMS OF
PRODUCTION**

A customized maintenance contract ensures better cost control, increased equipment availability, and lasting performance.

We also offer maintenance for your equipment, regardless of the brand.

Maintenance contract offers tailored to your needs

COMFORT

1 preventive visit per year

10% discount on your spare parts


Priority troubleshooting available within 72 hours maximum in France

PREMIUM

Up to 3 preventive visits per year

15% discount on your spare parts

Priority troubleshooting available within 72 hours maximum in France

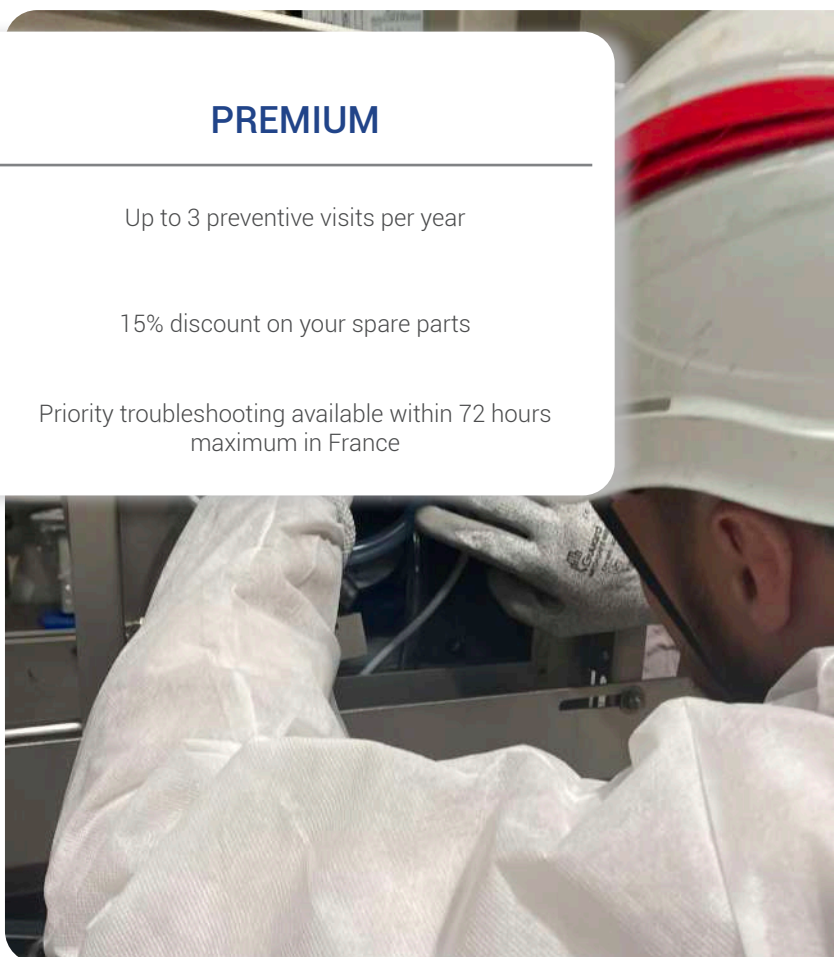

Technical hygiene audit

In the food industry, hygiene is never handled uniformly: each zone, each surface, and each risk level require a tailored response.



In your production rooms, a detail can make all the difference. Our technical audit provides you with a complete and objective analysis of your facilities to limit risks, streamline flows, and strengthen food safety.


Our objectives



SECURE YOUR
PRODUCTION



ANTICIPATE
INSPECTIONS



REASSURE YOUR
AUDITORS

One zone, one requirement

This is what color coding from the Vikan professional brushware range, offered by Acinox, enables: one color per zone and per use, for clearer, safer cleaning, and in compliance with HACCP protocols. At the end of the technical audit, our experts identify the specific needs of each of your zones and recommend the Vikan color coding plan best suited to your facilities, flows, and on-site constraints, to sustainably secure your production.



WHAT WE ANALYZE

- **Zoning**
Clear, coherent, and logical
- **Pedestrian and vehicle flows**
Circulation, crossing, flow management
- **Airlocks, changing rooms & hygiene equipment**
- **Protocols VS on-site reality**

WHAT YOU RECEIVE

- **Complete diagnosis**
Observations, strengths/weaknesses, areas for improvement
- **Concrete recommendations**
Quickly applicable, customized
- **Recommendations**
Color coding adapted to your zones
- **Discussions with our experts**
Live feedback and on-site advice
- **Personalized support**
Post-audit follow-up, according to your needs

Technical hotline & after-sales service (SAV)



NEED HELP OR INFORMATION? WE ARE HERE FOR YOU!



TECHNICAL HOTLINE

A question? A doubt? A technical problem? Our team of experts is at your disposal to respond quickly, with precision and efficiency.

Contact us for:

- Get answers to your technical questions
- Solve a problem related to the use of a product
- Understand and master our solutions
- Receive personalized advice
- Find quick solutions to any difficulty encountered

+33 (0) 7 59 67 86 30



AFTER-SALES SERVICE (SAV) - SPARE PARTS & CUSTOMER SUPPORT

A problem after your purchase? A need for a spare part?

Our AFTER-SALES SERVICE (SAV) team takes over to provide you with a quick, clear, and personalized solution.

Contact us for:

- Identify and provide the spare part suited to your equipment
- Advise you on a replacement or a repair
- Manage your returns and exchanges
- Handle your complaints and delivery issues
- Respond to your warranty requests

+33 (0) 2 40 09 13 46




Numbers available on WhatsApp for calls outside mainland France.



Our commitment: to listen to you

Whether it is for technical advice or an after-sales service (SAV) question, we are committed to providing you with clear answers as quickly as possible. Because we are convinced that good service is above all about real human presence.

Our contacts

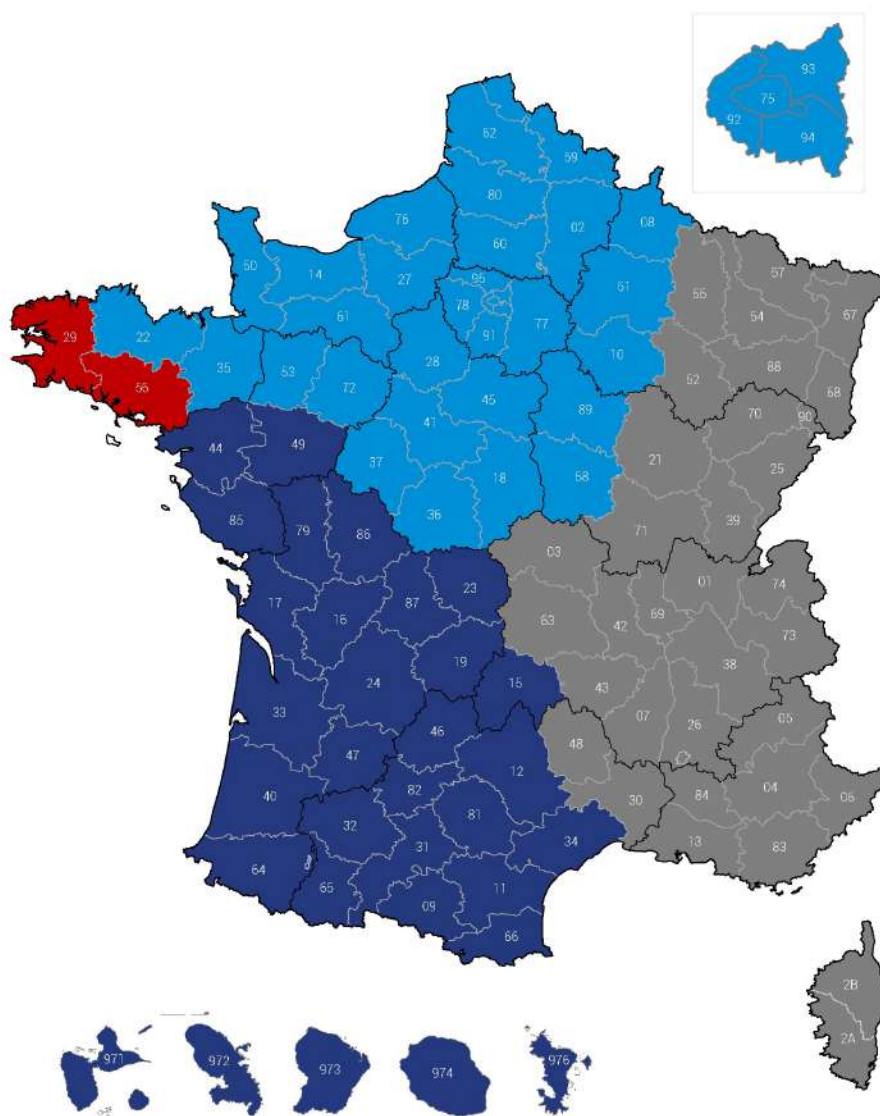

Capucine GAMAIN

General and Sales Director
capucine.gamain@acinox.fr
+33(0)6 13 50 64 70

Arthur ALLIOT

Export Director
arthur.alliot@acinox.fr
+33 (0)6 18 11 40 57

Adélaïde FOUCHER

Sales Assistant
adelaide.foucher@acinox.fr
+33(0) 2 49 09 13 37

Simon LORHO

Technical expert
simon.lorho@acinox.fr
+33 (0)6 20 90 11 46

Nicolas DESCORMES

Technical expert
nicolas.descormes@acinox.fr
+33 (0) 7 66 97 51 66

Karine TESSIER

Sales Assistant
karine.tessier@acinox.fr
+33(0) 2 49 09 13 46

The color of your department indicates your sales contact and your ADV contact.

Our expertise

DESCALING & PASSIVATION

Acinox fabrications undergo, after welding, a descaling – passivation operation by immersion in a specific acid bath.

The main benefit of this procedure is the restoration of the corrosion resistance of the manufactured part.



ELECTROPOLISHING

Electropolishing is a chemical surface treatment technique using electrolytic action that removes metal from the surface of a part ion by ion.

The goal is to reduce microroughness in order to improve surface cleaning. Acinox products can be electropolished on request.



MICROBLASTING

The microblasting operation for stainless steels is a mechanical treatment by projecting abrasive with compressed air (glass beads with a grain size of 100/200 microns).

All Acinox products have a microblasted finish.

It provides a uniform, satin-finished surface and increases corrosion resistance by creating a pre-stress.



Summary



FLOOR
HYGIENE

11



HYGIENE
EQUIPMENT

24



LOCKROOMS, STORAGE
& PROTECTIONS

73



HANDLING
& LIFTING

82

Floor hygiene



STAINLESS STEEL FLOOR DRAINS
FLOOR DRAINS FOR FOOTBATHS
STAINLESS STEEL BUFFER FRAMES
SLOT AND GRID CHANNELS
EXPANSION JOINTS

12
16
17
18
22





STAINLESS STEEL FLOOR DRAINS

HOW TO CHOOSE YOUR DRAIN?

The choice of floor drain depends on several criteria, such as the Load class, the volume of liquid to be drained, and specific structural parameters.

LOAD CLASSES

Load classes for floor drain grids in buildings according to EN-1253



K3 (3 kN)

Areas subject only to pedestrian traffic



R50 (50 kN)

Areas where vehicles are in use



L15 (15 kN)

Commercial spaces with light vehicle traffic



M125 (125 kN)

Areas where vehicles are in use



A15 (15 kN)


Areas subject to pedestrian and bicycle traffic

The load classes listed are defined under static load conditions.

To select your grating, you will need to answer the following questions:

- Will the grating need to support the load of a pallet or a Forklift truck?
- If it will be subjected to the load of a Forklift truck, what will be the wheels (sizes, types) and the frequency of use?

HOW DO YOU INTERPRET OUR PRODUCT PART NUMBERS?

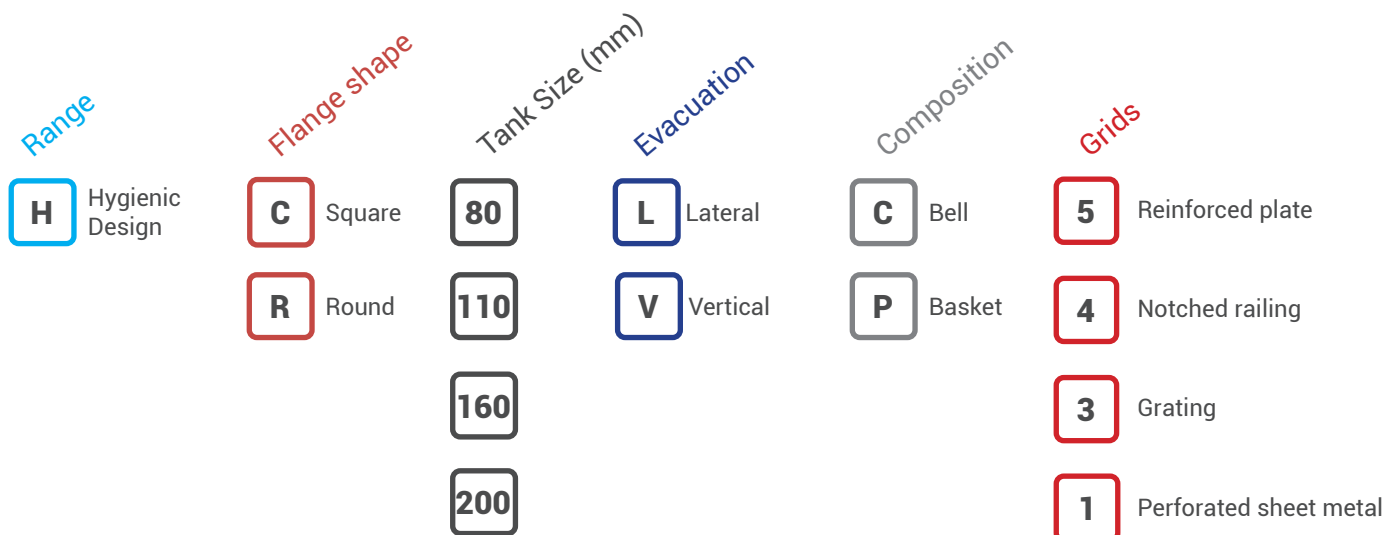

Example:



Part number HC160VC is a stainless steel trap from the Hygienic Design range, featuring a square flange and a 160mm tank size. It features a vertical drain, a bell, and a serrated bar grid.



STAINLESS STEEL FLOOR DRAINS

All our drains are made of 304L/316L stainless steel. In addition, you can choose the grid best suited to your application, based on the load class and intended use.

Hygienic Design range

The Hygienic Design range of drains has been designed to meet the highest hygiene standards in sensitive industrial environments. Compliant with EHEDG standards, it features a seamless deep-drawn design with an integridd seal to minimize retention areas and the risk of bacterial growth. The absence of a cover plate allows for particularly effective High-pressure jet cleaning, making this line ideally suited for production areas. Its design, which features no right angles and flush welds, facilitates maintenance and ensures optimal hygiene.

The Hygienic Design range also helps reduce production downtime thanks to quick and simplified cleaning. Drainage performance is significantly superior to that of a standard trap, with a flow rate of up to 5.7 L/s (342 L/min), a flow rate up to three times faster. Finally, the Removable water seal allows for thorough cleaning of the trap, ensuring lasting and controlled hygiene.



* These components can be customized to suit your needs.



STAINLESS STEEL FLOOR DRAINS

OUR GRIDS



Perforated metal grid (1)



Non-slip grid (3)



Notched bar grid (4)



Reinforced plate (5)



80

Reference	Flange (mm)	Tank (mm)	Water Guard (mm)	DN (Ø mm)	Flow line (mm)	H (mm)	Flange Type	Outlet Type	Bell/ basket	Basket Volume (L)	Compatible Grid Types	Load	Flow Rate (L/s)
HC080VC	100x100	Ø77	18	40	57	57	Square	Vertical	Bell-shaped	Filter	Perforated sheet metal (1)	K3 (3 kN)	0,25



Hygienic Design drain
Vertical outlet

110

Reference	Flange (mm)	Tank (mm)	Water Guard (mm)	DN (Ø mm)	Flow line (mm)	H (mm)	Flange Type	Outlet Type	Bell/ basket	Basket Volume (L)	Compatible Grid Types	Load	Flow Rate (L/s)
HC110VC	150x150	Ø110	50	50	132	132	Square	Vertical	Bell-shaped	Filter	Perforated sheet metal (1)	K3 (3 kN)	0,9
HC110LC	150x150	Ø110	50	50	132	132	Square	Side	Bell-shaped	Filter	Perforated sheet metal (1)	K3 (3 kN)	0,9



Hygienic Design drain
Vertical outlet



Hygienic Design drain
Side outlet



STAINLESS STEEL FLOOR DRAINS

160

Reference	Flange (mm)	Tank (mm)	Water Guard (mm)	DN (Ø mm)	Flow line (mm)	H (mm)	Flange Type	Outlet Type	Bell/ basket	Basket Volume (L)	Compatible Grid Types	Load	Flow Rate (L/s)
HC160VC	150x150	Ø110	50	75	137	137	Square	Vertical	Bell	Filter	Reinforced plate (5)	M125 (125 kN)	0,9
HC160LC	150x150	Ø110	50	75	137	137	Square	Side	Bell	Filter	Reinforced plate (5)	M125 (125 kN)	0,9
HR160VP	Ø200	Ø157	50	75	189	189	Round	Vertical	Basket	0,45	Notched railing (4)	M125 (125 kN)	2,1
											Reinforced plate (5)	M125 (125 kN)	2,1
HR160LP	Ø200	Ø157	50	75	189	189	Round	Side	Basket	0,45	Notched railing (4)	M125 (125 kN)	1,8
											Reinforced plate (5)	M125 (125 kN)	1,8
HC160VP	200x200	Ø157	50	110	192	192	Square	Vertical	Basket	0,5	Non-slip grating (3)	L15 (15 kN)	2,1
											Notched railing (4)	M125 (125 kN)	2,1
											Reinforced plate (5)	M125 (125 kN)	2,1
HC160LP	200x200	Ø157	50	110	202	202	Square	Side	Basket	0,5	Non-slip grating (3)	L15 (15 kN)	1,8
											Notched railing (4)	M125 (125 kN)	1,8
											Reinforced plate (5)	M125 (125 kN)	1,8

200

Reference	Flange (mm)	Tank (mm)	Water Guard (mm)	DN (Ø mm)	Flow line (mm)	H (mm)	Flange Type	Outlet Type	Bell/ basket	Basket Volume (L)	Compatible Grid Types	Load	Flow Rate (L/s)
HR200VC	Ø200	Ø110	50	110	144	144	Round	Vertical	Bell-shaped	Filter	Notched railing (4)	M125 (125 kN)	0,9
											Reinforced plate (5)	M125 (125 kN)	0,9
HR200VP	Ø300	Ø255	50	110	240	240	Round	Vertical	Basket for waste	2,9	Notched railing (4)	M125 (125 kN)	5,7
											Reinforced plate (5)	M125 (125 kN)	5,7
HR200LP	Ø300	Ø255	50	110	260	260	Round	Side	Basket for waste	2,9	Notched railing (4)	M125 (125 kN)	5
											Reinforced plate (5)	M125 (125 kN)	5
HC200VP	300x300	Ø255	50	110	244	244	Square	Vertical	Basket for waste	2,9	Notched railing (4)	M125 (125 kN)	5,7
											Reinforced plate (5)	M125 (125 kN)	5,7
HC200LP	300x300	Ø255	50	110	264	264	Square	Side	Basket for waste	2,9	Notched railing (4)	M125 (125 kN)	5
											Reinforced plate (5)	M125 (125 kN)	5



Square Drain, Hygienic Design
Vertical outlet



Square Drain, Hygienic Design
Side outlet



Round Drain, Hygienic Design
Vertical outlet



Round Drain, Hygienic Design
Side outlet



STAINLESS STEEL FLOOR DRAINS FOR FOOTBATHS


R110CKJ-SPI

FOR BUILT-IN FOOTBATHS


Round-tub footbath drain for tiled footbaths, with overflow tube and grid featuring an O-ring seal.

To be installed in a corner of the footbath.

Made of electropolished 316L stainless steel.

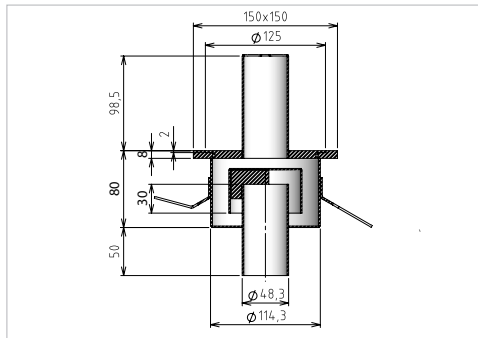

Available with a sealing flange.

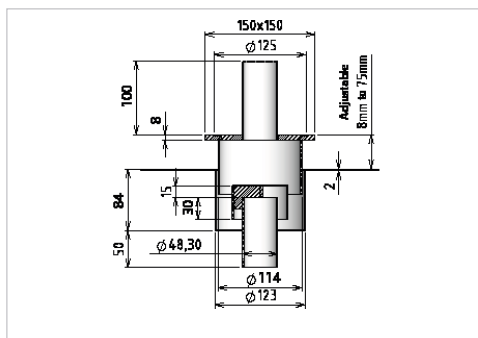


SPC

FOR BUILT-IN FOOTBATHS

Bottom drain for square-tub footbaths for tiled footbaths, with a wrench for opening the SMS plug.

Tank to be embedded

Made of electropolished 316L stainless steel

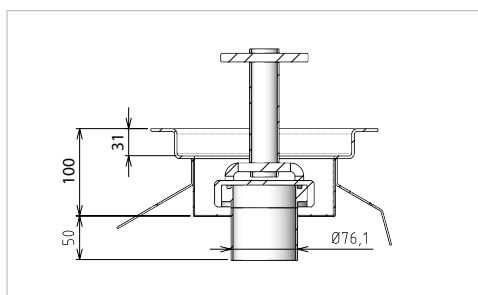

OTHER GRIDS AVAILABLE



G1 Bar Grid




G3 grid
Perforated sheet
metal




STAINLESS STEEL BUFFER FRAMES

CT

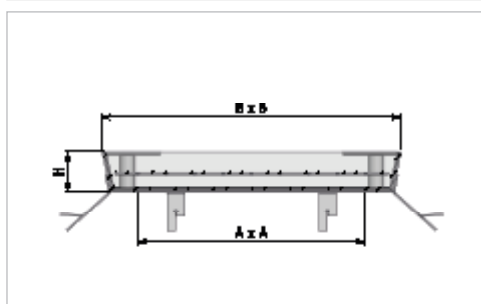

BUFFER FRAMES

Stainless steel buffer frames are used to inspect underground drainage systems.

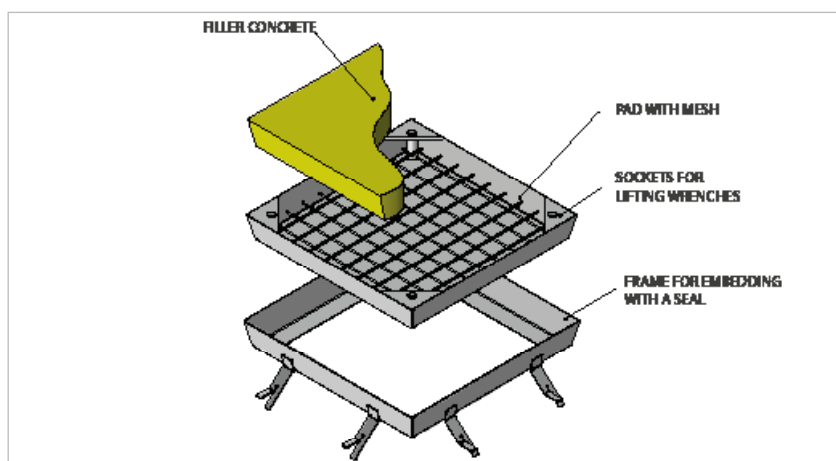

H (mm)	Part No.	A (mm)	B (mm)	Impact load 100x100	Availability In stock - Upon request
50	CT350	300	415	2,500 daN	Stock
70	CT470	400	525	2,500 daN	Stock
	CT570	500	625	2,500 daN	Stock
	CT670	600	725	2,500 daN	Upon request
	CT770	700	825	2,500 daN	Upon request
100	CT410	400	540	3,900 daN	Stock
	CT510	500	640	3,900 daN	Stock
	CT610	600	740	3,900 daN	Stock
	CT710	700	840	3,900 daN	Upon request
	CT810	800	940	3,900 daN	Stock
	CT910	900	1040	3,900 daN	Upon request
	CT1010	1000	1140	3,900 daN	Upon request

Some precautions to take during installation:

- Fill the cover with concrete, taking into account the height of the tile. Ensure the surface is level before pouring the concrete. The mounting plates for the lifting keys (provided) must be protected during this operation.
- Install the frame.
- Install the concrete cover.
- Never pour concrete over the frame without the cover in place.

OPTIONS



Made of 316L
stainless steel



Safe drainage



STAINLESS STEEL FLOOR GUTTERS

LOAD CLASSES

Load classes for outdoor channel gratings according to EN-1433



A15 (15 kN)

Areas subject to pedestrian and bicycle traffic



B125 (125 kN)

Lateral drainage of passenger car parking lots, sidewalk drainage



C250 (250 kN)

Surfaces subject to light commercial vehicle traffic

The load classes listed are defined under static load conditions.

To select your grating, you will need to answer the following questions:

- Will the grating need to support the load of a pallet or a Forklift truck?
- If the surface is subject to Forklift truck traffic, what will be the wheels' specifications (size, type) and frequency of use?

Why choose our Hygienic Design channels?

- **Time savings during installation ($\approx 13\%$)** Thanks to drain flanges reinforced with epoxy resin or stainless steel plate. Installation and gasket kits are included, ensuring a faster and safer installation.
- **Water savings (up to 94%)** Our channels require only 3 to 4 L of water to flush waste, compared to 90 to 96 L with a standard system.



SLOT AND GRID CHANNELS-2 PRODUCT LINES

Acinox offers two ranges of stainless steel channels tailored to your needs:

Hygienic Design range

Our gratings are designed to optimize installation speed while ensuring a reliable and durable installation. The channel flanges ensure seamless integration with the floor upon installation. The included installation and sealant kits significantly reduce installation time, with an estimated 13% time savings compared to standard installation. Our solutions also stand out for their significant reduction in water consumption during waste drainage. Thanks to their optimized design, only 3 liters of water are needed, compared to 96 liters for a conventional system—a 94% savings. The V-shaped basin bottom promotes rapid drainage of effluent toward the basket, thereby limiting the amount of water required.

These distinctive features ensure a high-performance, cost-effective solution that is perfectly suited to the demands of professional environments.

Standard range

The channels in this line integrate seamlessly into industrial environments where specific sanitary requirements are not necessary. Their durable design and proven performance make them a reliable solution for meeting the varied needs of industrial facilities. Available from stock, they provide an immediate and effective solution for your projects. With a classic and versatile pickled finish and available in brushed or raw versions, these channels are designed to offer great versatility.

What sets them apart from the Hygienic Design range:


- Permanent water seal trap
- Double-slope flat-bottom channel
- Sturdy, mechanically welded grating





DRAINAGE CHANNEL

CG

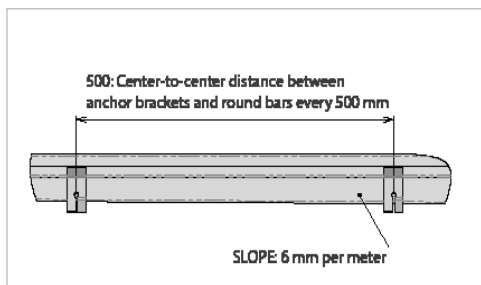

Some examples:

DRAINAGE CHANNEL WITH BUILT-IN SLOPE

The standard stainless steel grating channel is designed to drain wastewater containing solid waste. Available in Standard or Hygienic Design finishes.

We custom-manufacture all your channels.

CONSTRUCTION

- 2-millimeter-thick stainless steel sheet.
- Channel width from 100 to 400 millimeters.
- Integridd slope at the bottom of the channel of 0.6% (6 mm/m)
- Bolt-on connecting plates every 3 meters.
- Spacer pins and anchoring brackets every 500 millimeters.
- Option for basket-type traps with vertical or lateral outlets.

Total width	Tank width (in mm)	Grid width (in mm)	Drain dimension (in mm)	Drain diameter (in mm)	Drain Flow Rate (in L/s)
Standard					
220	100	145	100X300	Ø99	2
270	150	195	150X300	Ø99	2
320	200	245	200X300	Ø99	2
370	250	295	250X300	Ø99	2
420	300	345	300X300	Ø99	2
470	350	395	350X350	Ø125	3.6
520	400	445	400X400	Ø125	3.6
Hygienic					
200	132	155	Ø110	Ø110	0.9
240	172	195	Ø157	Ø110	2
330	262	285	Ø204	Ø110	5

For any other dimensions, please contact us.

OPTIONS

* Leveling cylinders

* Reinforced angle iron

GUTTER GRIDS




Perforated sheet metal (1)



Sanitary railing (2)



Non-slip grating (3)



Notched railing (4)



Reinforced (5)





SLOTTED CHANNELS


CF

SLOT CHANNEL WITH INTEGRIDD SLOPE

The stainless steel slotted channel is designed to drain wastewater that does not contain solid waste. Available in Standard or Hygienic Design finishes.



CONSTRUCTION

- 2 mm thick stainless steel sheet
- 20 mm opening at the top
- Built-in slope at the bottom of the channel of 0.6% (6 mm/m)
- Bolt-on connection plates every 3 meters
- Spacer pins and anchor brackets every 500 m
- Option for basket-type traps with vertical or lateral outlets
- 90 mm body width


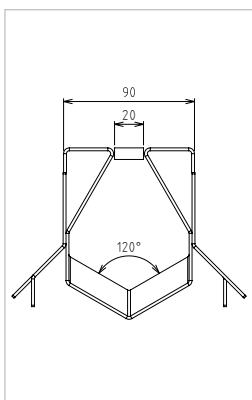


SIDE VIEW

TOP VIEW

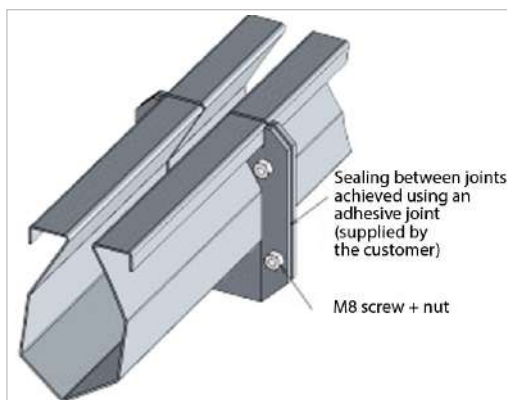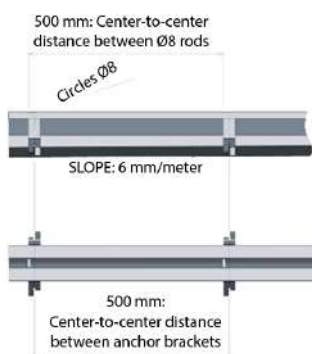

OPTIONS

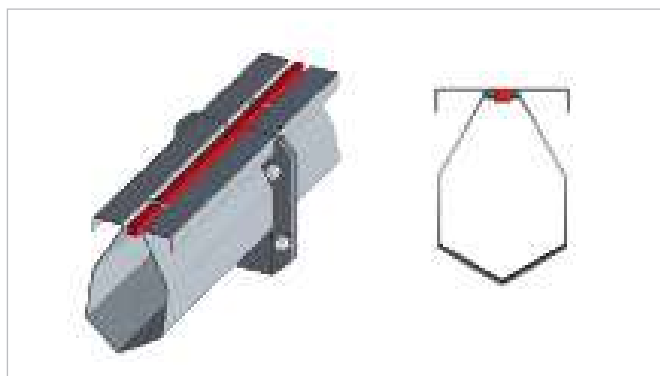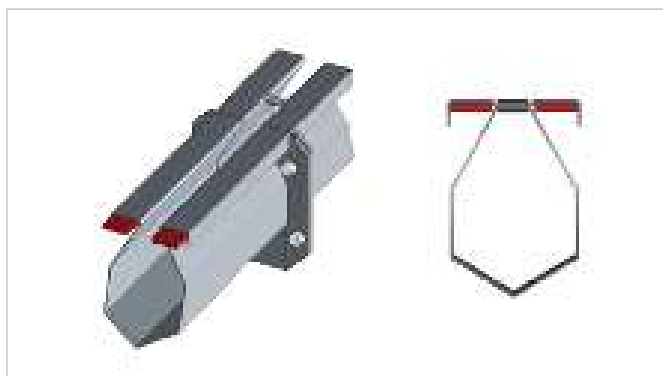



EXPANSION JOINTS



JDS

STANDARD TYPE

Construction:

Made from 40 x 40 x 4 mm angle iron

3-meter-long sections available by special order

Available in stock in 2-meter lengths



JDI 40

CONCEALED TYPE 40

Construction:

Made from 40 x 40 x 4 mm angle iron with a hidden joint

3-meter-long sections available by special order

JDI 50




CONCEALED TYPE 50

Construction:

Made from 50 x 50 x 5 mm angle iron with invisible joint

3-meter-long sections available by special order

Available in stock in 2-meter lengths

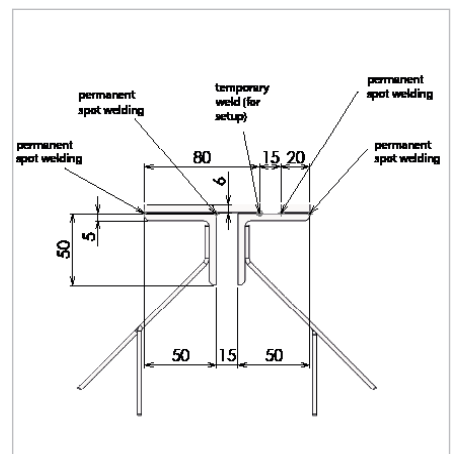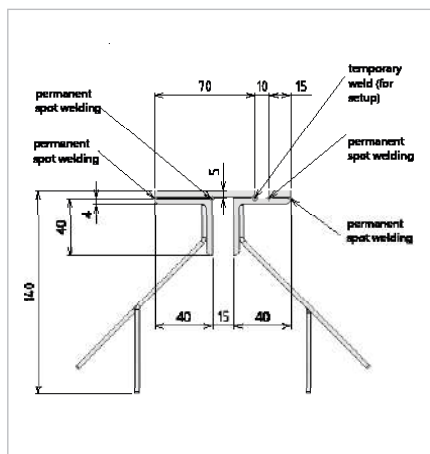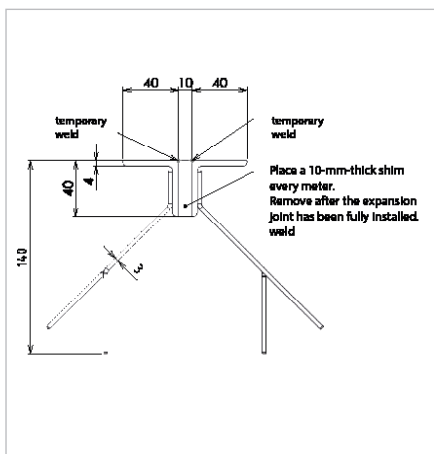



STAINLESS STEEL ANGLE BARS

TYPE LQ

Application: Dock step nosing

Manufacturing: Made from 40 x 40 x 4 mm angle bar



TYPE L

Application: Manhole frame / angle iron frame

Manufacturing: Made of 40 x 40 x 4 mm angle iron, formed from sheet metal




TYPE Z

Application: Angle iron frame


Construction: Made of 50 x 50 x 5 mm angle iron, folded sheet metal




TYPE LQ3

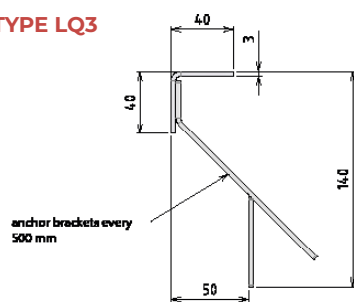


TYPE L30



TYPE Z30




TYPE LQ4

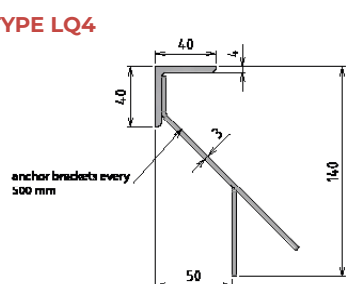


Available in stock in 2-meter lengths


TYPE L40



TYPE Z40



TYPE LQ5



Available in stock in 2-meter lengths

Hygiene equipment



HAND HYGIENE	25
SINK	31
BOOT WASHERS / APRON WASHERS	33
BOOT/SOLE WASHERS	34
SOLE WASHERS	37
PLATFORM	40
SOLE CLEANER AND HAND WASHER	41
COMPACT AIRLOCK	42
SOAKING TRAY	48
JERRYCAN HOLDER	49
SANYPASS	50
TRIPODS AND DISPENSERS	54
KNIFE STERILIZER	56
WASHING	57
SHOE CABINET	60
BOOT DRYER	61
GLOVE DRYER	62
DRYING CABINET	63
PROFESSIONAL CLEANING SUPPLIES	64



Our maintenance contract ensures the proper functioning and reliability of your equipment, allowing your teams to focus on essential tasks. Hygiene, material handling, and lifting equipment are eligible for the maintenance contract. For more information, please see page 5 of the catalog.




INDIVIDUAL HEMISPHERICAL KNEE-CONTROL HANDWASH BASIN



The Acinox knee-activated individual handwash basin ensures optimal hygiene thanks to the absence of bacterial retention. It is equipped with Delabie faucets and features a compact design that saves space. Installation is made easier by a 40 mm clearance from the wall. The flow rate can be easily adjusted without removing the cover plate, thanks to an aerator accessible directly via the logo.

TECHNICAL DATA

Construction	Stainless steel sheet, thickness 2,5 mm
Overview	Micro-bead blasting
Tank	Ø 300
Faucet hardware	Chrome-plated brass, 7-second flow time
Flow rate	3 L/min per station
Water inlet	15/21 male threaded
Water Outlet	40/49 male threaded

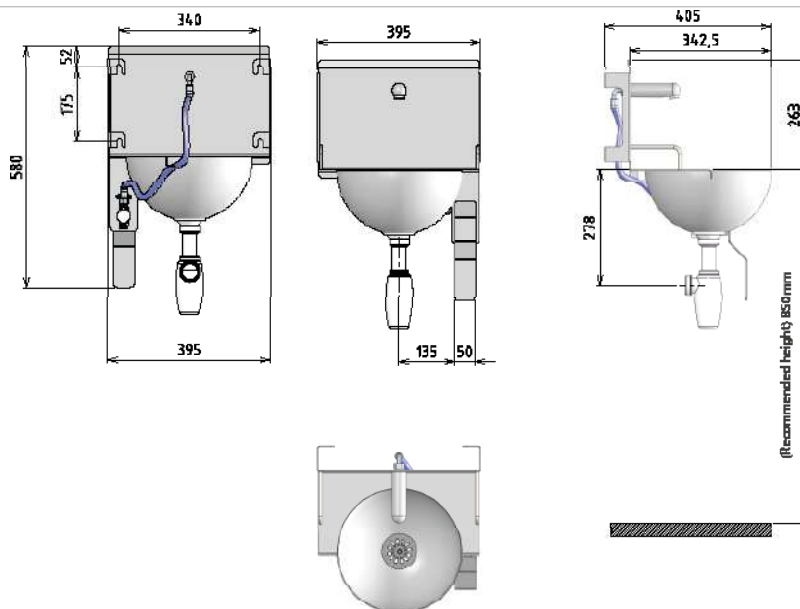

OPTIONS

Compact premixer	Electropolished 316L stainless steel spout	Thigh-strap control	On legs	Nickel-plated brass trap	Stainless steel trap	316 stainless steel L	LME-CE Knee Control Water-Heater Module	LMO-CO Optical control Water-heater module





HAND HYGIENE

LMCG

KNEE CONTROL TROUGH HAND WASH BASIN



The handwashing basin with knee control is designed to ensure optimal hygiene thanks to a design that minimizes bacterial buildup and allows for hands-free use. Equipped with Delabie faucets, renowned for their reliability and durability, it perfectly meets the demands of professional environments. Its compact design saves significant space while featuring a deep basin that ensures comfortable use. With a wall clearance of just 40 mm, it fits easily into tight spaces. The flow rate can be easily adjusted without removing the cover plate, thanks to discreet access via the aerator and an integrated opening at the logo. The result: the most compact handwashing station with knee control on the market, combining hygiene, convenience, and performance for everyday use.

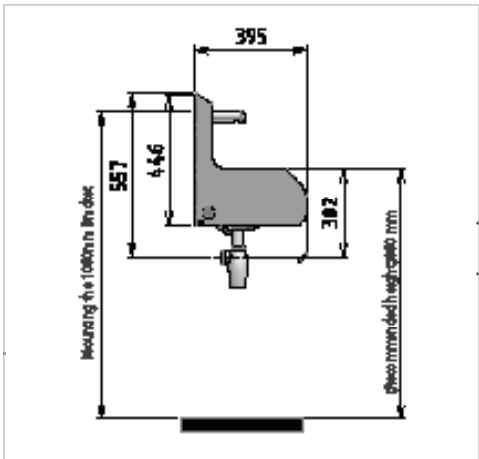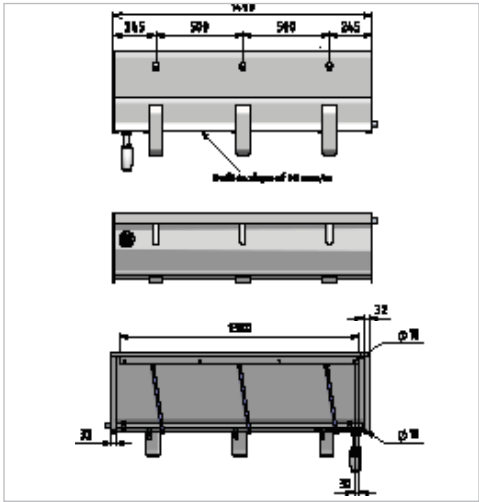

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Tank	Formed with a slope
Faucet hardware	Chrome-plated brass, 7-second flow time
Flow rate	3 L/min per station
Water inlet	20/27 male threaded
Water Outlet	40/49 male threaded

PART NUMBERS

	1 SPOUT	2 SPOUTS	3 SPOUTS	4 SPOUTS	5 SPOUTS	6 SPOUTS
Wall-mounted		LMCG100	LMCG150	LMCG200	LMCG250	LMCG300
On legs	LMCGP	LMCG100P	LMCG150P	LMCG200P	LMCG250P	LMCG300P

OPTIONS



Thermostatic
Mixing Faucet



316L stainless
steel



Back-to-back



On legs



Nickel-plated
brass trap



Stainless steel
trap




Dyson hand
dryer available
upon request




HAND WASH BASIN-WITH OPTICAL CONTROL & INTEGRATED DYSON HAND DRYER®

The Dyson handwashing station combines washing and drying in a single touchless unit, ensuring optimal hygiene and a fast, safe user experience. It completely eliminates the need for consumables, reduces waste, and lowers recurring supply costs. Its laminar airflow minimizes water splashing, keeping floors clean and safe, even in high-traffic areas. This handwashing station is also highly economical: its timed water flow uses only 1.8 L/min-50% less water than a standard faucet-and its drying system reduces electricity consumption by up to 76% compared to a standard hand dryer. The result: a high-performance, cost-effective, and environmentally friendly unit that provides users with maximum hygiene with every use.

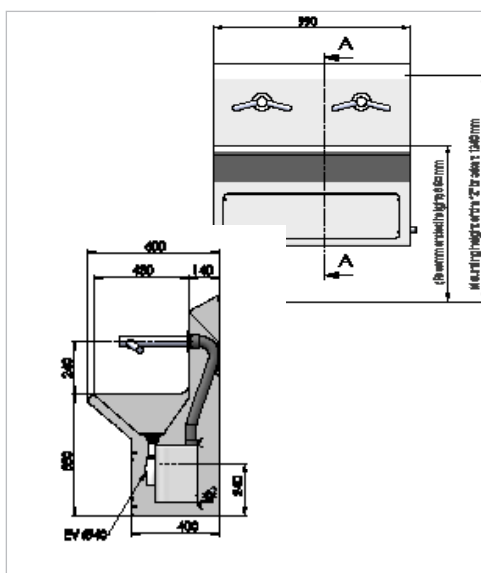

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Tank	Formed with a slope
Faucet hardware	Dyson Wash & Dry
Drying time	14 seconds. Optimal hygiene thanks to the HEPA filter. Operating costs reduced by 76% compared to other hand dryers.
Flow rate	3 L/min per station
Water inlet	20/27 male threaded
Water Outlet	40/49 male threaded

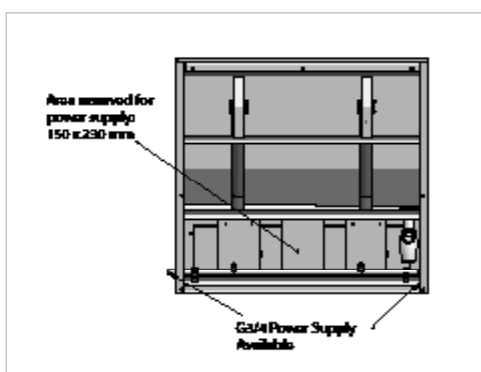

PART NUMBERS

	1 SPOUT	2 SPOUTS	3 SPOUTS	4 SPOUTS	5 SPOUTS	6 SPOUTS
Wall-mounted	LMD	LMCD100	-	-	-	-
On legs	LMDP	LMCD100P	LMCD150P	LMCD200P	LMCD250P	LMCD300P

OPTIONS



Mixing Faucet



316L stainless steel



Nickel-plated brass trap



Stainless steel trap



Back-to-back




HAND HYGIENE

LMD



DYSON® HAND WASH STATION WITH INTEGRATED SOAP DISPENSER

The Dyson handwashing station combines washing, soap dispensing, and drying into a single touchless unit, ensuring optimal hygiene and a fast, safe user experience. Thanks to its built-in soap dispenser, everything needed for a complete hand wash is included, simplifying use and eliminating the need for additional products. It completely eliminates the need for consumables, reduces waste, and lowers recurring supply costs. Its laminar airflow minimizes water splashing, keeping floors clean and safe, even in high-traffic areas. Economical and environmentally friendly, it consumes only 1.8 L/min thanks to its timed spray-50% less water than a conventional faucet-and its drying system reduces electricity consumption by up to 76% compared to a standard hand dryer.

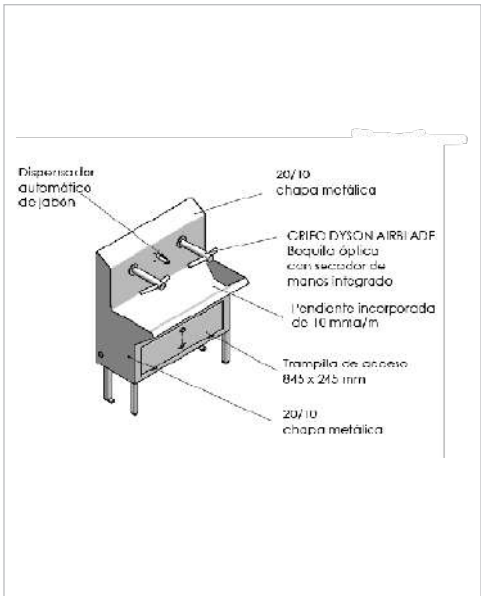

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Tank	Formed with a slope
Faucet hardware	Dyson Wash & Dry
Drying time	14 seconds. Optimal hygiene thanks to the HEPA filter. Operating costs reduced by 76% compared to other hand dryers.
Flow rate	3 L/min per station
Water inlet	20/27 male threaded
Water Outlet	40/49 male threaded

OPTIONS



Mixing Faucet



316L stainless steel



Nickel-plated brass trap



Stainless steel trap








Back-to-back



INDIVIDUAL HAND WASH STATION KNEE CONTROL BASIN

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Tank	Formed with a slope
Faucet hardware	Chrome-plated brass, 7-second flow time
Flow rate	3 L/min per station
Water inlet	15/21 male threaded
Water Outlet	40/49 male threaded

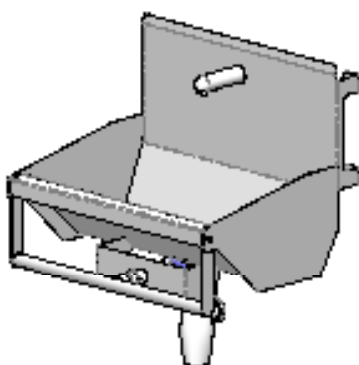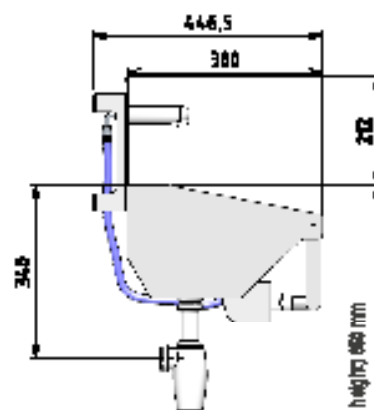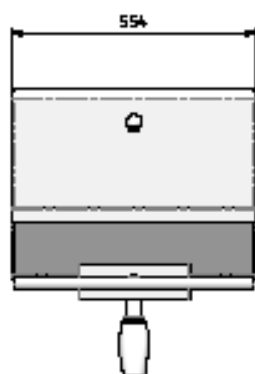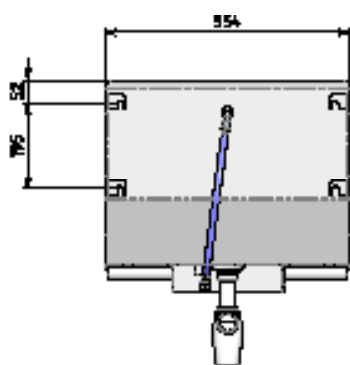


OPTIONS



Battery-
powered
electronic
control



Compact
pre-mixer



Freestanding
hand-washing
station



Nickel-plated
brass trap




Stainless
steel trap



316 L
stainless steel



LME-CE Knee
control Water-
heater module



LMO-CO
Optical
control Water-
heater module



HAND HYGIENE



LM-CE



WATER-HEATER MODULE

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Capacity	10 L
Water inlet	15/21 male threaded
Water Outlet	40/49 male threaded
Power	1.6 on sink 220V/50Hz single-phase




LME-CE
Knee controlLMO-CE
optical controlHOTWATER TANK
IN LOW POSITION

LM0-MEU-CE

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Capacity	10 L
Water inlet	15/21 male threaded
Water Outlet	Ø 40 mm siphoned
Power	2 kW under-sink, 220 V/50 Hz single-phase

OPTIONS

316L stainless
steel




SINK

PL



STANDARD SINKS

Our sinks are designed entirely to order to meet the specific needs of each installation. They are built to be both sturdy and durable, ensuring heavy-duty use without compromising on quality. With Delabie, you benefit from a proven lifespan of up to 15 years. Each sink basin is also equipped with an overflow drain as standard, providing safety and convenience for everyday use.

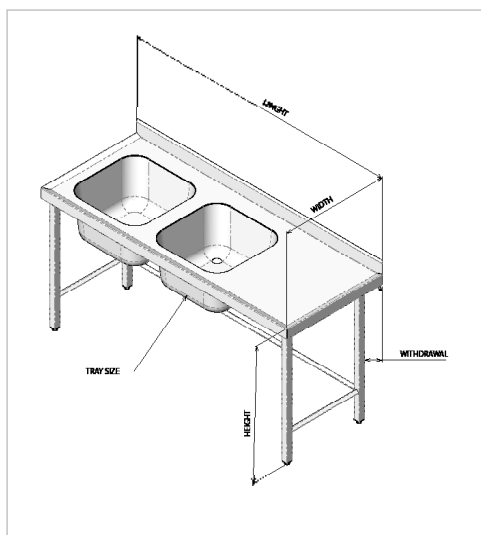

TECHNICAL DATA

Construction	2 mm thick stainless steel sheet Back splash and drip-proof edge
Overview	Micro-bead blasting
Bottom	Stamped 500x500, depth . 300
Faucet hardware	Pre-equipped upon request (see . Faucets on the next page)
Water Outlet	Overflow drain with grate (white PVC trap)
Adjustable legs	ABS +/-20 mm

1 BASIN
700 X 700 MM
PL0700B



1 BASIN, 1 DISH RACK
1200 X 700 MM
PL1200BE



2 BASINS
1200 X 700 MM
PL1200BB



2 TRAYS, 1 DRIP TRAY
1800 X 700 MM
PL1800BBE



2 TRAYS, 2 DRAIN TRAYS,
2400 X 700 MM
PL2400EBBE





SINK

PL



CUSTOM-MADE DISHWASHING STATIONS

Our teams are here to help you design a sink that meets your needs. Contact them for more information.

TECHNICAL DATA

Overview	Micro-bead blasting
Bottom	Custom-stamped or hand-formed
Faucet hardware	Pre-equipped upon request
Water Outlet	Overflow drain with grate (white PVC siphon)



FAUCET HARDWARE

Our sinks can be equipped with high-quality hand showers or faucets. We offer the entire Delabie professional line.



OPTIONS




Sink on the right



Sink skirt



Faucets available upon request



Storage



Custom-made, hand-formed basin





BOOT WASHERS / APRON WASHERS

TECHNICAL DATA



Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Number of workstations	Up to 3 compartments
Tank	Sloped with basket
Faucet hardware	Ball valve with Water-passing brush
Flow rate	7 L/min per station
Water supply	20/27 male threaded
Water discharge	Ø 48.3 smooth, siphoned Drain valve





REF. LB1

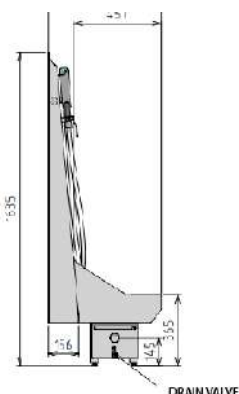

REF. LB2

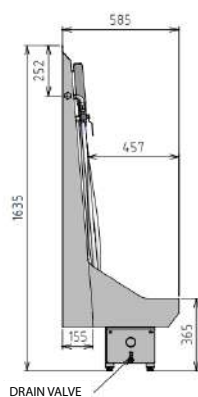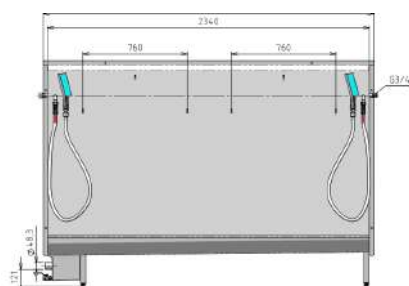

REF. LB3

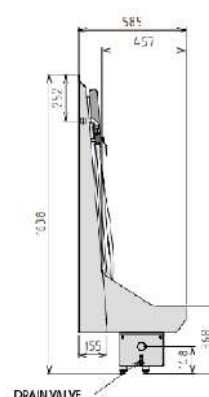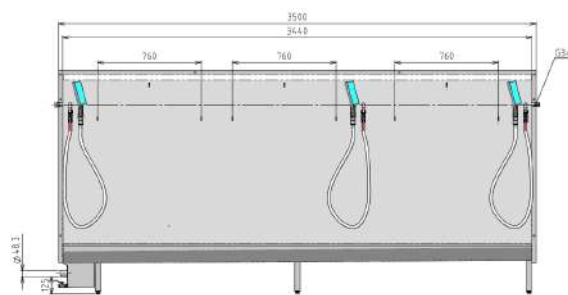

OPTIONS

316 L

316L stainless steel



Dosing pump



BOOT/SOLE WASHERS

LBSM 300

INDIVIDUAL BOOT/SOLE WASHER

The individual boot/sole washer combines performance and compact design for optimal shoe cleaning. It offers numerous advantages:

- Effectively cleans soles and the tops of boots, eliminating 99.9% of bacteria.
- Lowest height on the market, for safe use.
- Very compact, easy to fit even in tight spaces.
- Precise dosing of cleaning solution via a Venturi system, ensuring both economy and performance.
- Fewer components to disassemble and reduced cleaning solution usage, for simple and economical operation.
- Safe design: solid sheet metal prevents limbs from getting caught.
- No operator detection required: housing optimized for safe passage without risk of injury.
- 2-in-1: suitable for both operators and visitors.
- A single access point for boots and shoes, more economical than having two separate passages.
- Hygienic: flat-edge-free design to prevent residue buildup and facilitate cleaning.
- Time-saving: quick and easy maintenance thanks to accessible components.

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	2.5 L/min at 3 bar
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	0.6 kW - 400 V / 50 Hz, 3-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	Ø 48.3 smooth

OPTIONS



Dosing pump



Peristaltic pump


Lockable jerry
can holder

Dry industry
version



BIMODAL CONTINUOUS-FLOW SOLE/BOOT WASHER

The Acinox bimodal continuous-flow sole/boot washer offers numerous advantages:

- Shoe cleaning power
- Open-door detection on all conveyor grates
- Waterproof motor compartments
- Sloped tank with waste basket and standard right- or left-side drain
- Precise dosing of cleaning solution via a Venturi system
- Safe thanks to their low height (the lowest on the market)
- Integrated all-stainless-steel electrical enclosure
- Safety-oriented design: solid sheet metal that prevents limbs from getting caught
- No operator detection required: housing optimized for safe passage without risk of breakage
- 2-in-1: suitable for both operators and visitors
- A single access point for boots and shoes: more cost-effective than having two separate passages
- Hygienic: flat-edge-free design to prevent debris buildup and facilitate cleaning
- Time-saving: quick and easy maintenance thanks to component accessibility

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	5 L/min
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	2.2 kW - 400 V / 50 Hz, three-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	1 ½" male, non-siphoned

OPTIONS



Peristaltic pump



Dosing pump



Installation in a pit



Platform installation



Drum retention



Wall-mounted electrical enclosure



Dry industry version




BOOT/SOLE WASHERS

LB5B


5-BRUSH BOOT WASHER


The Acinox 5-Brush Motorized Boot Washer offers exceptional benefits for optimal cleaning:

- Forward-only operation: Ensures smooth and continuous operation,
- Continuous forced passage: Ensures efficient use by requiring systematic cleaning,
- Easy brush removal: Designed to simplify brush care and maintenance,
- High-quality components: Equipped with gear motors, sturdy brushes, and a reliable electrical cabinet for maximum durability,
- Optimal cleaning efficiency: Thanks to the high-density brush fibers and powerful motors, cleaning is fast and thorough.
- Precise cleaning solution dosing: The Venturi system ensures optimal and economical dosing of the cleaning solution for enhanced performance.

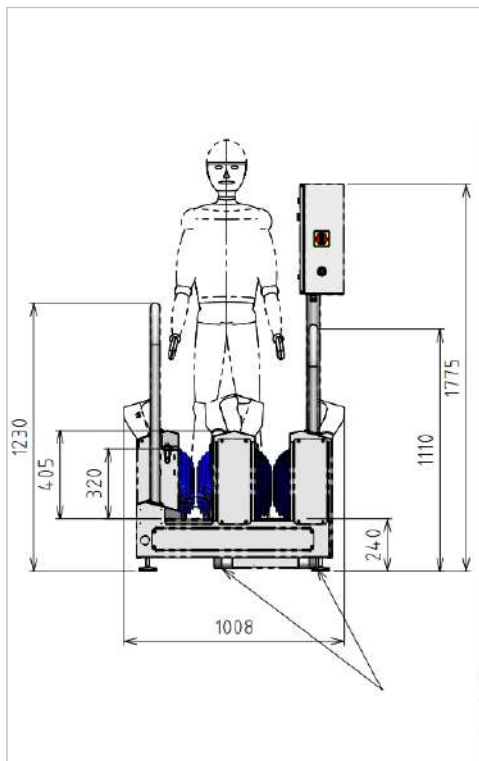

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	5 L/min
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	1.8 kW - 400 V / 50 Hz, 3-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	1 ½" male, non-siphoned

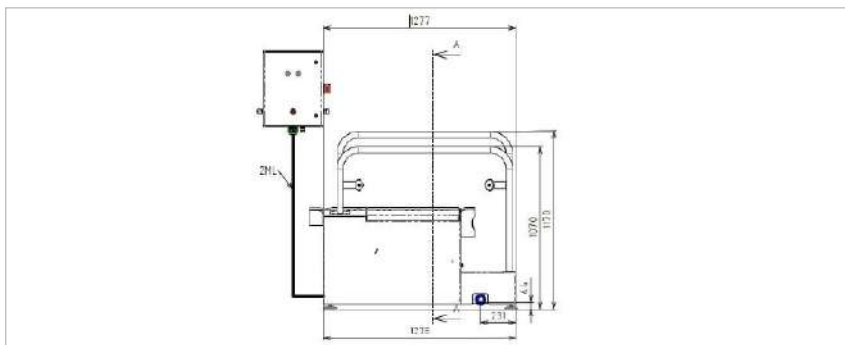

OPTIONS



Peristaltic pump



Dosing pump



Platform installation



Wall-mounted electrical enclosure



Step input / output



Version industrial dry



Drum retention



Installation in a pit



SOLE WASHERS

LSM1-V3





INDIVIDUAL SHOE SOLE WASHER

The individual sole washer offers numerous advantages:

- Cleans cleats and the top of the cleat, as well as the toe and soles of the shoes (optional brush for the upper part of the shoe)
- Very compact and space-saving machine
- Cost-effective and affordable
- Brush can be removed without tools
- High-quality components (geared motor, brush, electrical cabinet)
- High cleaning efficiency thanks to the brush's high-density fibers and high motor torque
- Precise dosing of cleaning solution via a Venturi system
- The lowest-profile sole washers on the market, eliminating 99.9% of bacteria
- Available in single-phase or three-phase versions

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped
Flow rate	2.5 L/min at 3 bar
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	0.2 kW – 230 V / 50 Hz single-phase or 400 V / 50 Hz three-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	Ø 48.3 smooth

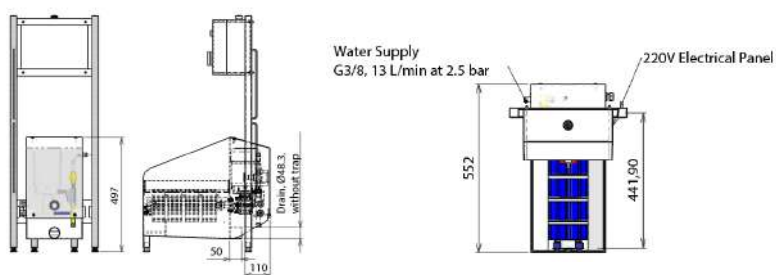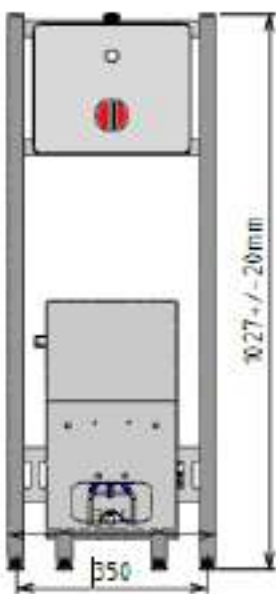

OPTIONS



Manual brush
with Water flow



Dry industry
version



Metering pump



Peristaltic pump



SOLE WASHER

LSPOTC




COURT CONTINUOUS-FLOW SOLE WASHER

The Acinox continuous-flow sole washer, featuring two motorized brushes and a very compact design, offers numerous advantages:

- Allows users to keep moving forward and ensures regular, continuous flow
- No slowdown in foot traffic
- Brushes can be easily removed without tools, in complete safety
- Maintenance from above for easy access
- High-quality components (geared motor, brushes, electrical cabinet)
- Optimal cleaning efficiency thanks to the high-density brush fibers and the motors' high torque
- Precise dosing of cleaning solution via a Venturi system
- System to hold the grate in the open position
- Electropolished finish in high-traffic areas
- Measuring less than 1 m², it is the most compact and lowest-profile shoe sole washer on the market
- No bacterial buildup: eliminates 99.9% of bacteria

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	3 L/min at 3 bars
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	0.6 kW - 400 V / 50 Hz, 3-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	1" male, non-siphoned

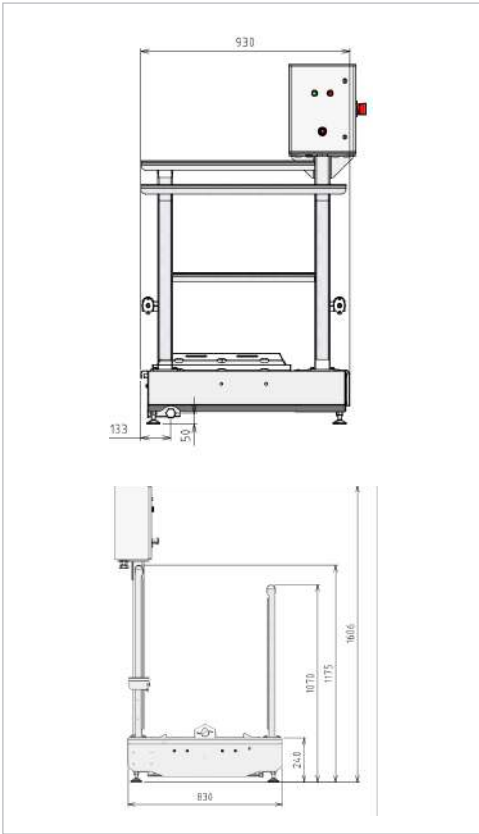

OPTIONS



Non-cavity
design-dry
industrial version



Peristaltic pump



Dosing pump



Lockable jerry can
holder



Inlet & outlet




Installation in
a pit



STANDARD CONTINUOUS-FLOW SOLE WASHER

The Acinox standard continuous-flow sole washer offers numerous advantages:

- Mandatory passage, ensuring compliance with hygiene regulations.
- No slowdown in foot traffic, allowing for a steady flow of people.
- Requires users to pass through regularly and continuously.
- Brushes can be easily and safely removed without tools.
- Top-access maintenance for simplified upkeep.
- Highly effective cleaning thanks to the high-density brush fibers and the motors' high torque.
- Precise dosing of cleaning solution via a venturi system.
- Grid retention system that keeps the grid in the open position.
- A long brush for thorough cleaning.
- No bacterial buildup thanks to an electropolished finish in high-traffic areas.
- One of the lowest-profile sole washers on the market for optimal comfort.
- Eliminates 99.9% of bacteria.

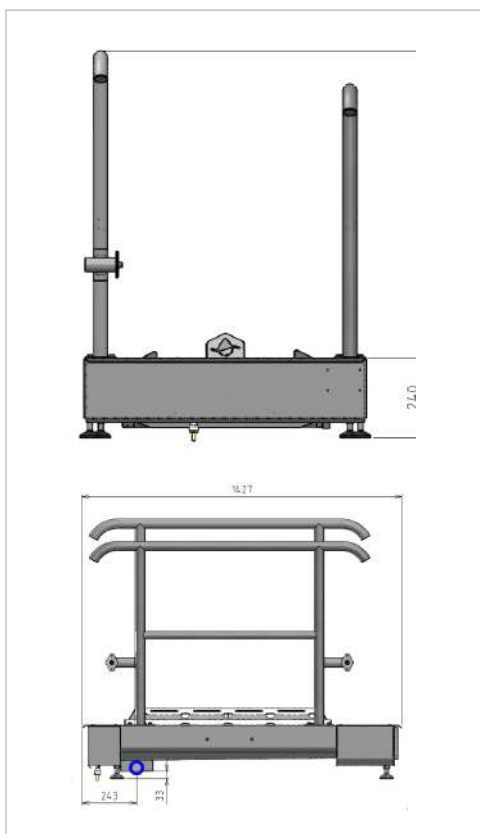

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	3.5 L/min at 3 bar
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	0.6 kW - 400 V / 50 Hz, 3-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	1" male, non-siphoned

OPTIONS



Dry industrial version




Dosing pump



Lockable jerry can holder



Inlet & outlet



Installation in a pit



PLATFORM



PLATFORM - HANDWASHING MODULE

Our hand-washing station solution, installed directly at the exit of the disinfection airlock, ensures seamless continuity in the hand hygiene protocol. Positioned at the optimal height, it ensures easy and ergonomic access for all operators. This system enhances hygiene controls by ensuring systematic handwashing before entering the production area, thereby contributing to improved food safety and compliance with the most stringent hygiene standards.

TECHNICAL DATA

Construction	304L Stainless Steel
Overview	Micro-bead blasting



TRIPOD PLATFORM WITH HMI

Our disinfection airlock exit platform, featuring a tripod and an integrated HMI, guarantees rigorous access control while ensuring strict adherence to hygiene protocols. Located at the end of the line, it requires systematic hand washing before each passage, thanks to intelligent detection and clear guidance via the user interface. The turnstile, which is locked by default, unlocks only once hygiene requirements are met, ensuring optimal traceability of entries and enhanced security. Ergonomic and intuitive, this solution integrates seamlessly into demanding environments, in compliance with the strictest standards for industrial hygiene and food safety.

TECHNICAL DATA


Construction	304L Stainless Steel
Overview	Micro-bead blasting



OPTIQUE SINGLE-PERSON SHOE/HAND WASHER

The Acinox 2-brush shoe and hand washer combines hygiene, convenience, and performance in a compact and smart design. Its main advantages:

- Simultaneous cleaning of shoes and hands: a single unit, a real time-saver
- Very compact machine, ideal for tight spaces (guaranteed to save space)
- A single Water inlet and a single drain for simplified installation
- High-quality components: gearmotor, sturdy brushes, reliable electrical cabinet
- Brushes are easy to remove, for quick and hassle-free maintenance
- Precise dosing of cleaning solution via a Venturi system
- Eliminates 99.9% of bacteria

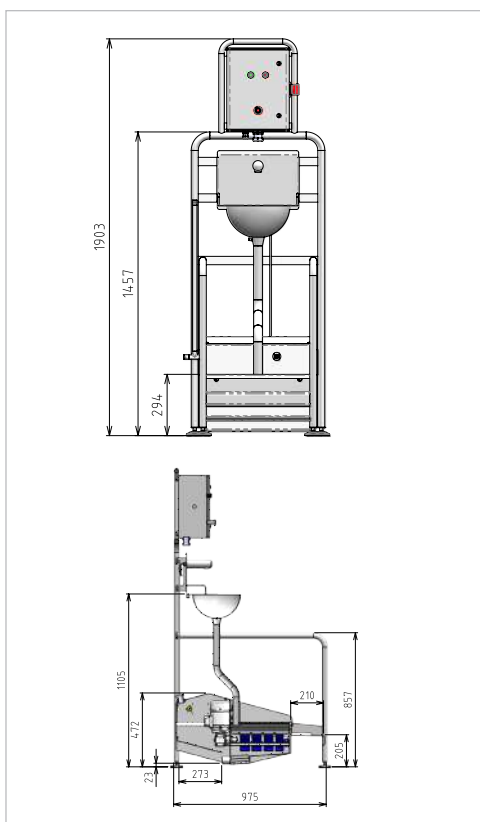

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	3 L/min at 3 bars
Temperature	Maximum 50°C for Water
Water supply	15/21 male
Power	0.4 kW - 400 V / 50 Hz 3-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	ø48.3 smooth
Hand Washer	Type LMO - constructed of stainless steel sheet, thickness . 2,5 mm - microbeaded finish - basin Ø300 - Flow rate: 3 L/min per station - Water inlet: 15/21 male threaded - Water outlet: 40/49 male threaded

OPTIONS



Peristaltic pump



Dosing pump



Lockable jerry can holder



COMPACT AIRLOCK

SASTC-H



VERY COMPACT DISINFECTION AIRLOCK -
HYGIENIC

Developed in 2025, the ultra-compact Acinox airlock is currently the smallest of its kind in the world. Its design, which has no hollow spaces, eliminates areas where bacteria can accumulate and makes cleaning easier. This enables 99.9% bacterial elimination, ensuring maximum and lasting hygiene without compromise.


With a footprint of less than 1 m², it fits easily into even the most confined spaces. Its integrated HMI makes the airlock easy to use on a daily basis, for both quality control and maintenance teams:

- Cycle control and customizable settings
- Inventory management with low-stock alerts
- Direct access to maintenance functions

The airlock ensures the disinfection of hands and shoe soles:

- Timed dispenser for even application
- One of the lowest-profile sole washers on the market, suitable for all environments, ensuring a smooth flow of traffic

The electromechanical turnstile tripod ensures one-way traffic and secure locking, in full compliance with health protocols. Finally, its innovative design allows for twice the throughput, improving productivity while enhancing health and safety.

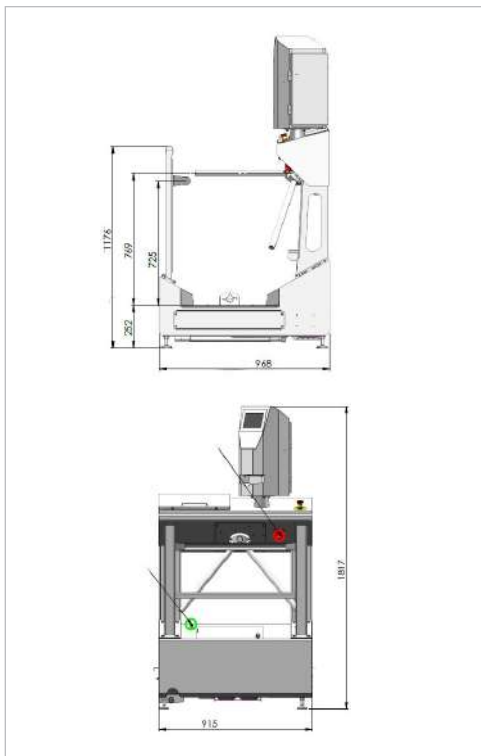

TECHNICAL DATA

Construction	25/10-gauge stainless steel sheet
Overview	Microblasted – Handrails and supports without hollow sections
Water supply	G3/8 - 2.5 bar - 13/min
Water drainage	DN26 1"
Power supply	400 V/50 Hz 3P+T

OPTIONS



Lockable jerry can holder



Peristaltic pump



Installation in a pit



COMPACT AIRLOCK

SASTC-S

VERY COMPACT DISINFECTION SAS - STANDARD

Developed in 2025, the ultra-compact Acinox airlock is currently the smallest of its kind in the world.



With a footprint of less than 1 m², it fits easily into even the most confined spaces. This space savings also translates into cost savings, both during installation and operation. Thanks to its integrated HMI, the airlock is simple and intuitive to use for both quality control and maintenance teams:

- Cycle control and customizable settings
- Inventory management with low-stock alerts
- Direct access to maintenance functions

The airlock ensures the disinfection of hands and shoe soles:

- Timed dispenser for uniform application
- One of the lowest-profile sole washers on the market, suitable for all environments, ensuring a smooth passage

The electromechanical turnstile tripod enforces one-way traffic and secure locking, in compliance with health protocols. Finally, its innovative design allows for twice the throughput, improving productivity without compromising hygiene.

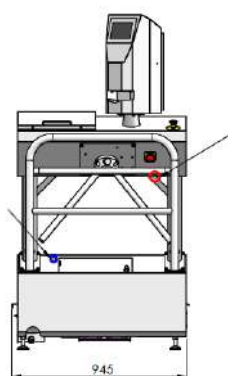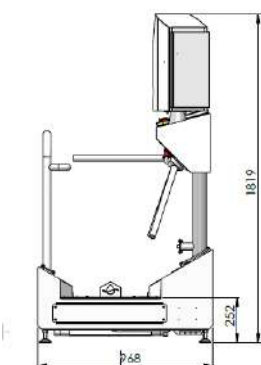

TECHNICAL DATA

Construction	25/10-gauge stainless steel sheet
Overview	Microblasted – Handrails and supports without hollow sections
Water supply	G3/8 - 2.5 bar - 13/min
Water drainage	DN26 1"
Power supply	400 V/50 Hz 3P+T

OPTIONS



Lockable jerry can holder



Peristaltic pump



Installation in a pit



COMPACT AIRLOCK

SASTC



DOUBLE AIRLOCK FOR HIGH-VOLUME TRAFFIC

A compact solution for simultaneous and secure handwashing. The dual-station system was designed for production sites where every square meter counts. With its two integrated stations, it allows two operators to wash their hands at the same time, without compromising either hand hygiene or efficient workflow management.

Space Optimization

Its back-to-back design minimizes floor space while retaining all the features of a full-featured airlock. Convenient when space is at a premium.

Operational Efficiency

Two operators can wash their hands simultaneously: less waiting, smoother traffic flow, and faster transit through sensitive areas.

Controlled Hygiene

Each station is equipped with devices that meet food-service industry requirements: touchless sensors, secure dispensers, and stainless-steel sinks... In short, everything needed for a clean and controlled wash.

Smooth Flow

The layout naturally separates incoming and outgoing traffic, minimizing cross-traffic and improving the management of clean zones.

TECHNICAL DATA

Construction	25/10-gauge stainless steel sheet
Overview	Microbilled finish-Handrails and supports with no hollow sections
Water supply	G3/8 - 2.5 bar - 13/min
Water drainage	DN26 1"
Power supply	400 V/50 Hz 3P+T



COMPACT AIRLOCK WITH TURNSTILE AND HAND SANITIZER STATION - HYGIENIC

The Acinox compact airlock is a complete solution that ensures personal hygiene while taking up minimal space.


The layout of the compact sole washer and disinfection tripod can be configured for right- or left-hand use.

This model features its own stainless steel electrical enclosure with a programmable logic controller (PLC).

- Ergonomic dispenser that swivels toward the operator
- MistWater and soap dispenser

TECHNICAL DATA

Construction	2.5 mm thick stainless steel sheet
Overview	Micro-bead blasting
Bottom	Sloped with basket
Flow rate	3.5 L/min
Temperature	Maximum 50°C for Water
Water supply	12/17 female
Power	0.8 kW - 400 V / 50 Hz, 3-phase.
Venturi adjustment	From 0.3 to 7.5%
Water discharge	1-inch male, non-siphoned
Tripod	All-stainless-steel tripod turnstile controlled by a programmable logic controller
Soap or hand sanitizer dispenser	2-hand timed dispenser

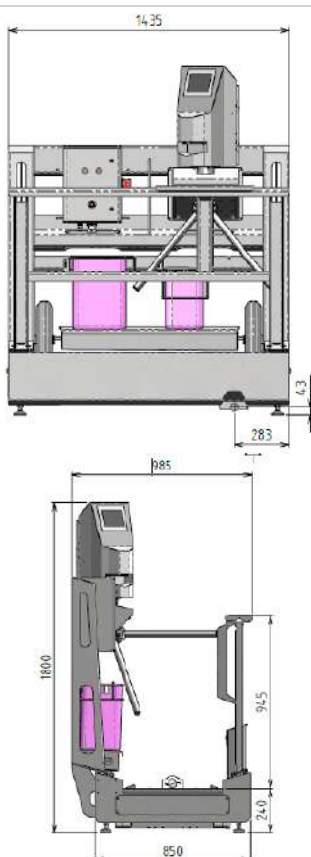

OPTIONS



Entry and exit steps



Dosing pump



Installation in a pit



COMPACT AIRLOCK

SASDES



WATERLESS DISINFECTION STATION - HYGIENIC WITH INTEGRATED HMI


The Waterless disinfection airlock, patented by Acinox, ensures optimal disinfection of access points to dry areas through precise spraying, without using water. **Convenient and self-contained**, it can be installed anywhere, requiring neither a water supply nor drainage. Designed according to Hygienic Design principles and EHEDG standards, it features a **structure with no hollow spaces, making it easy** to clean and reducing the risk of contamination. Modular and **patented in Europe**, it can be combined with a sole brush or a tripod for a comprehensive hygiene solution tailored to the requirements of industrial and food-processing environments.

TECHNICAL DATA

Construction	25/10-gauge stainless steel sheet
Overview	Microblasted – Handrails and supports without hollow sections
Bottom	Sloped with direct G1/2 drain
Detection	2 infrared sensors (Soles) 2 infrared sensors (Hands)
Flow rate	4 spray spouts, 0.4 L/min (Soles) 2 dispensing spouts (hands)
Programming	Via PLC with control screen
Cycle time	2 s
Power supply (*)	220 V, 50 Hz, P. 0.5 kW
Power consumption	5 L ~ 500 cycles (Soles) 5 L ~ 1,500 cycles (Uppers)
Accessories	Document tray – Lockable 2x5L container holder on spill containment tray

POSSIBLE CONFIGURATIONS

- Electromechanical turnstile tripod
- Tripod positioning on the right or left

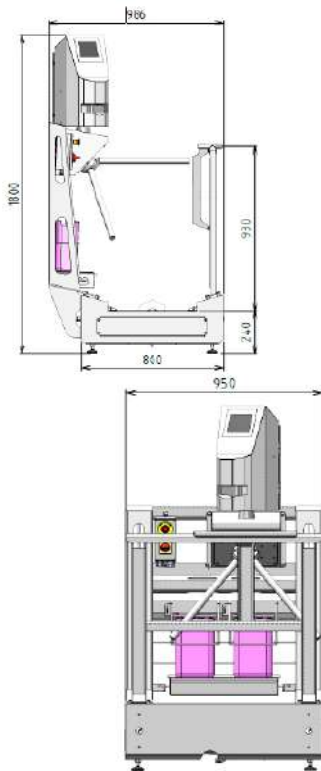

OPTIONS



Entry/exit step



Installation in a pit



Platform
installation





COMPACT AIRLOCK

SASBROSDDES-H

WATERLESS BRUSHING AND DISINFECTION AIRLOCK - HYGIENIC

The disinfection airlock patented by Acinox is a solution unique in the world, designed for industrial environments where Water is a real problem. With no Water supply or drainage required, it can be easily installed anywhere while meeting the strictest hygiene standards. Thanks to a high-performance mechanical brushing system combined with hydrogen peroxide spray, the SASBROSDDES eliminates 99.9% of bacteria-all without using a single drop of Water.

The result: a cost-effective and eco-friendly solution, ideal for sensitive sectors such as infant formula, cheese production, pharmaceuticals, and cosmetics. Another advantage: it is equipped with an HMI (Human-Machine Interface) for simple and intuitive control of disinfection parameters, enabling real-time monitoring. With one of the lowest-profile sole washers on the market, a hollow-free design for enhanced hygiene, and complete autonomy, this airlock stands out as a reliable, innovative, and uncompromising solution for the most demanding industries.

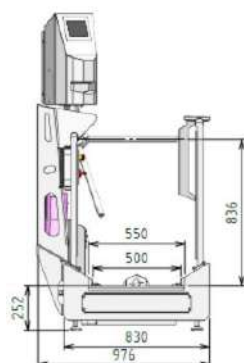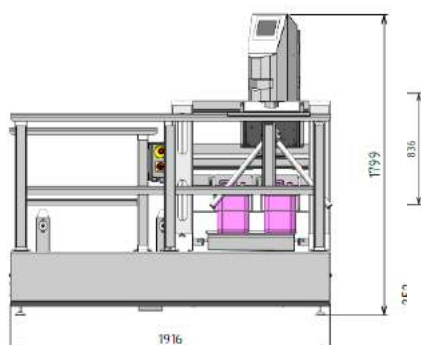

TECHNICAL DATA

Construction	25/10-gauge stainless steel sheet
Overview	Microbead-blasted Handrails and supports with no hollow sections
Water drainage	DN26 1" drain without a trap



SOAKING TRAY

BACTREMP-S



SOAKING TRAY WITH 2 BRUSHES

Follow the cleaning and disinfection protocol for all our devices containing brushes using the Acinox soaking basin.

This tank offers a practical and effective solution for maintaining impeccable hygiene in environments requiring regular disinfection of sole cleaning equipment. The tub is mounted on ABS legs that ensure stability and increased durability, while providing protection against damp surfaces.

TECHNICAL DATA

Construction	304L Stainless Steel
Basket capacity	2 brushes
Sloped bottom	Complete drainage of disinfectant liquid
Drain valve	Quick and easy drainage of disinfectant

BACTREMP-H



SOAKING TUB FOR 4 BRUSHES

The Acinox soaking tub allows you to follow the cleaning and disinfection protocol for all devices that contain brushes.

It offers a practical and effective solution for maintaining impeccable hygiene in environments requiring regular disinfection of sole cleaning tools. The tub is mounted on four wheels, making it easy to move and allowing for flexible use in a variety of settings.

TECHNICAL DATA

Construction	304L Stainless Steel
Basket capacity	4 brushes
Sloped bottom	Complete drainage of disinfectant liquid
Drain valve	Quick and easy drainage of disinfectant



JERRY CAN HOLDER

SUPJER01



JERRY CAN HOLDER

Our stainless steel jerry can holder helps you keep your chemicals secure. You can store one 20L jerry can or two 5L jerry cans in it. Its locking mechanism prevents chemicals from tipping over or spilling into your sewer system.

TECHNICAL DATA

Construction	304L Stainless Steel
Overview	Microbead-blasted

SUPJER03




JERRY CAN HOLDER

Our stainless steel jerry can holder helps you keep your chemicals secure. You can store one 20L jerry can or two 5L jerry cans in it. Its locking mechanism prevents chemicals from tipping over or spilling into your sewer system.

- Corrosion-resistant, our stainless steel jerry can holder allows you to safely store aggressive chemicals.
- Easy to clean and sterilize, it reduces the risk of cross-contamination.
- Designed to be sturdy and durable, it maximizes the product's lifespan.

TECHNICAL DATA

Construction	25/10-gauge stainless steel sheet
Overview	Microbead-blasted
Capacity	1 x 20L or 2 x 5L

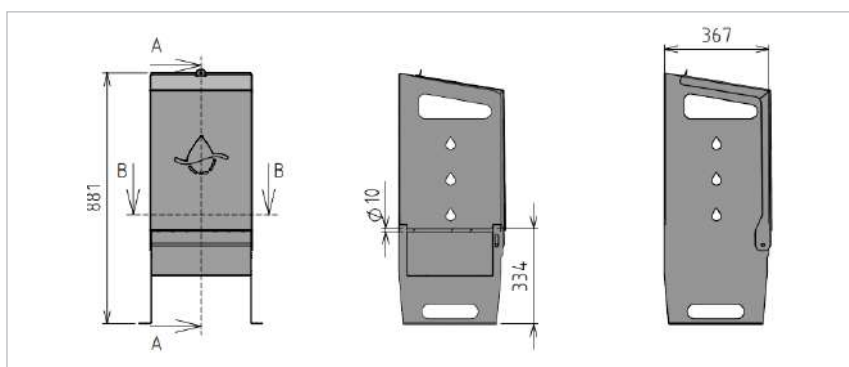



SANYPASS

SANYPASS 5000



SANYPASS FOR LOADS UP TO 5 METRIC TONS

The Sanypass is specifically designed for industrial sites where heavy equipment is in daily use. Capable of supporting loads of up to 5 metric tons, it allows forklift trucks, heavy-duty pallet jacks, and other wheeled equipment to pass over it without compromising cleaning effectiveness.

Advanced disinfection performance

Equipped with heavy-duty rotating brushes, the Sanypass eliminates 99.9% of bacteria on wheels and treads, while adapting to various types of surfaces. Its dynamic mechanism ensures uniform and rapid cleaning, treating each area in a single pass.

Robust and Durable Design

Built to withstand heavy loads and intensive use, the Sanypass guarantees rock-solid durability.

Ease of Maintenance and Flexibility

Maintenance is simplified thanks to its interchangeable brushes and tool-free servicing. With a thickness of just 5 cm, installation is easy. It is also possible to add an automatic dispensing station for fully automated management of cleaning products.

Eco-friendly and cost-effective

The Sanypass reduces water and chemical consumption while using sustainable materials to minimize environmental impact and ensuring effective disinfection to prevent cross-contamination. With the Sanypass, combine durability, performance, and hygiene for your most demanding industrial environments.

Width (mm)	Available lengths (mm)
500	1000, 1500, 2000, 2500, or 3000
1000	1000, 1500, 2000, 2500, 3000, or 3500
2000	2000, 2500, 3000, or 3500

OPTIONS



Dosing station



SANYPASS

SANYPASS 500



SANYPASS FOR LOADS UP TO 500 KG

The Sanypass is the ideal solution for fast, efficient, and hygienic cleaning of soles and wheels in industrial environments, even for heavy equipment. Its reinforced design allows for the smooth passage of pallet jacks, maintenance carts, and other wheeled equipment weighing up to 500 kg per contact point.

Advanced cleaning and disinfection

Eliminates 99.9% of bacteria on wheels and casters, reducing the risk of cross-contamination.

Sturdy and precise brushes

Suitable for all surface textures (smooth, rough, or delicate), they effectively remove embedded dirt, even in hard-to-reach areas.

Consistent and continuous cleaning

The dynamic motion ensures uniform cleaning of every area in a single pass.

Minimal depth

Requires only a 5-cm recess in the slab, making it compatible even with multi-story buildings.

Eco-friendly and cost-effective

Reduced water and chemical consumption; durable materials that lower maintenance costs and extend the life of the brushes.

Easy maintenance

Interchangeable brushes; maintenance and cleaning require no tools.



Width (mm)	Available lengths (mm)
500	1000, 1500, 2000, 2500, or 3000
1000	1000, 1500, 2000, 2500, 3000, or 3500
2000	2000, 2500, 3000, or 3500

OPTIONS



Dosing station



SANYPASS MOBILE

SANYMOB



SANYPASS MOBILE

The Sanypass Mobile is an innovative device designed to ensure fast and effective cleaning of shoe plates and wheels in industrial environments. Compact and portable, it stands out for its ease of movement and its ability to be disassembled for simplified maintenance. It also disinfects forklift wheels, operators, and mobile equipment, limiting cross-contamination and eliminating 99.9% of bacteria.

High-performance brushes

Made with sturdy fibers, they effectively remove embedded dirt, even in hard-to-reach areas.

Interchangeable brushes

For long-lasting use and adaptability to different needs.

Maximum adaptability

Automatic adjustment of brush pressure and speed based on surface texture

Mobility and flexibility

Unlike fixed devices, the Sanypass Mobile can be easily moved as needed, offering great versatility.

Simplified cleaning and tool-free maintenance

Easy to disassemble, wash, and maintain, ensuring effortless and hygienic cleaning.

Environmental responsibility

Reduced Water and chemical consumption thanks to its sustainable and eco-friendly design.

The Sanypass Mobile combines durability, efficiency, and practicality to meet the demands of modern industrial environments, while ensuring maximum hygiene and optimal protection against contamination.

Width (mm)	Available lengths (mm)
500	1000, 1500, 2000, 2500, or 3000
1000	1000, 1500, 2000, 2500, 3000, or 3500
2000	2000, 2500, 3000, or 3500



DOSING STATION



DOSING STATION - SANYPASS

Optimize cleaning and disinfection with precise automatic dosing.

Designed for demanding environments, the dosing station guarantees effective cleaning and disinfection of soles and wheels, while ensuring simple and safe use.

- Cleaning and disinfection of soles and wheels, suitable for food and industrial areas
- Automatic dosing for an optimal Water-to-detergent ratio
- Manual or programmed refilling with precise concentration control
- Sturdy construction in AISI 304 stainless steel for enhanced hygiene and durability
- Easy installation: 3/4" Water connection, 230V power supply, 1/2" connection
- Perfect for sites where hygiene is a top priority.

TECHNICAL DATA

Construction	304L Stainless Steel
Power supply	230V / N / PE – 1.5m cable
Weight	9.91 kg
Water connection	3/4"



TRIPODS AND DISPENSERS

DESTRIPI IHM

DESTRIPI IHM

Optimize the management of your disinfection airlocks with the integrated Acinox HMI, designed to make your operations smoother, faster, and safer. Intuitive and easy to use, it centralizes control of your equipment while offering a pleasant and efficient user experience.

- Simplified equipment control: management of priming pumps, manual activation of the turnstile, full access to machine settings.
- Intuitive and customizable interface: visual customization to simplify use and speed up the learning curve.
- Tracking and reporting: pass counts, detailed reports, and customizable alerts for precise monitoring of operations.
- Easier consumables management and maintenance: product levels, automatic orders, and clear diagnostics for fast and efficient maintenance.
- Modern connectivity: Internet and Ethernet compatible to stay connected and control your equipment remotely.
- Boosted productivity: twice as fast throughput to save time and reduce operational constraints.

User benefits:


- Smooth, ergonomic operation with the display facing the operator
- Customizable settings: low-level thresholds, automatic restocking, pass counting
- 100% maintenance access via the HMI platform
- Comprehensive inventory and consumables management

With the Acinox HMI, combine efficiency, safety, and ease of use for your disinfection systems.

OPTIONAL ALERTS:



Low level



Operating
for replacing
parts




Alerts
Request for
consumable
restocking from
the service
provider



MECHANICAL TRIPOD TRIP SWITCH

Acinox tripods are made entirely of 304L stainless steel, from the housing to the internal parts. This ensures their durability and reliability in production areas where cleaning is intensive.

It is used to assign a unique address within an aisle. Depending on its configuration, the "A" and "B" addresses are preset as open or locked. An unlocking key is used to release the locked access point.

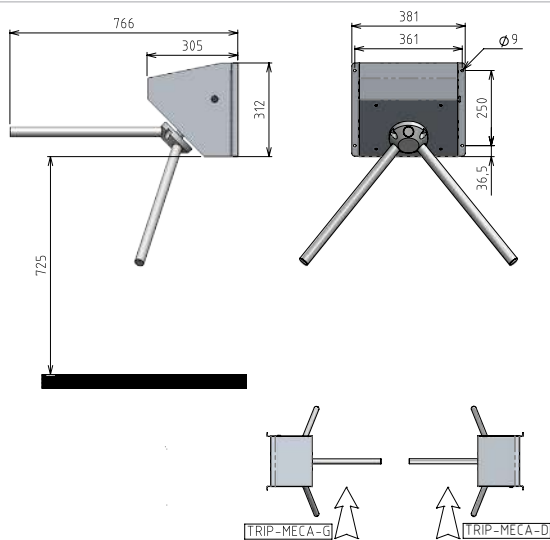

OPTIONS



On legs




Divider stand to guide your operators, with optional shelf and document holder



KNIFE STERILIZER

BSC10X

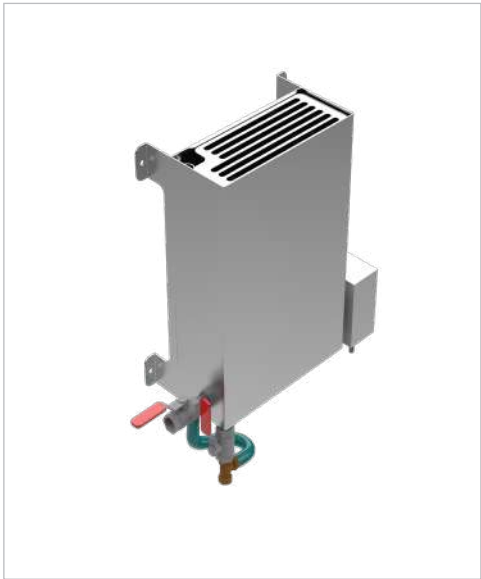

KNIFE STERILIZER

Designed to meet the hygiene requirements of professional environments, the knife sterilizer ensures fast and reliable disinfection of knives and kitchen utensils. Its stainless steel construction ensures a sturdy, durable solution that is perfectly suited for heavy-duty use.

Key Points

- Hot-water disinfection (70 °C): Effectively eliminates bacteria and residue in just 45 seconds.
- Compatibility with disinfectants: Can be used with various products to reinforce hygiene protocols.
- Suitable for all types of knives and utensils: Consistent disinfection, regardless of the material used.
- Sturdy stainless steel construction: Designed for continuous use in professional settings.

Applications

Commercial kitchens, restaurants, butcher shops, food processing facilities, or any environment requiring a high level of hygiene for cutting tools.

TECHNICAL DATA

Construction	Stainless steel sheet, thickness: 2 mm
Overview	Micro-bead blasting
Water Outlet	15/21 - male threaded
Power	Temperature-controlled heating element: 1000W / 220 V / 50 Hz



WASHING

LAVBE



EUROPE-SIZE CONTAINER WASHER

Designed to meet the strictest hygiene requirements, this washer is the ideal solution for thoroughly cleaning Euro containers. Custom-built, it adapts perfectly to the dimensions and specific features of your containers thanks to its modular design. Each machine is engineered to provide optimal cleaning, regardless of your bins' configuration. At the heart of the system is an automated interior cleaning mechanism that ensures consistent and effective cleaning. For the exterior, a high-pressure nozzle enables effective manual cleaning, complementing the process and ensuring impeccable hygiene down to the very last corner.

Combining speed, efficiency, and energy efficiency, this solution is designed to optimize washing time, Water consumption, and energy use. It thus addresses today's challenges of operational efficiency while incorporating an eco-friendly approach. A robust and flexible technology, designed to help professionals maintain their hygiene standards on a daily basis.



TECHNICAL DATA

Construction	304L Stainless Steel
Overview	Micro-bead blasting



WASHING

WASHING TUNNEL/TRAY WASHER



Our industrial tray washing tunnel is designed to meet the strictest hygiene requirements. It effectively cleans heavily soiled containers while optimizing your washing processes, with simple operation by a single person.

The speed is adjustable, the tank is fully accessible, and high-temperature rinsing ensures the absence of chemical residues. Delivered ready to install with electric or steam heating, it offers easy access to connections and allows for water recycling to reduce consumption. Its stainless steel frame ensures durability and compliance with industry standards. Ideal for cleaning industrial crates and bins, baskets and containers, unwashed dishes and machine parts, buckets and carts, tanks and thermal containers, as well as plates, trays, and tin cans.

Benefits:

- Optimal productivity with high throughput
- Reduced energy costs
- Simplified daily maintenance



TECHNICAL DATA

Dimensions	12,000 x 1,300 x 1,580 mm (W x D x H)
Construction	100% stainless steel frame
Options	Custom configurations for non-standard items; blow-off tunnel (various performance levels)

Part Number	Capacity	Variable-speed drive	Accumulator
LAVBAC100	100 cases/hour	No	No
LAVBAC100VAR	100 cases/hour	Yes	No
LAVBAC100VARAC	100 cases/hour	Yes	Yes
LAVBAC300	300 cases/h	No	No
LAVBAC300VAR	300 cases/h	Yes	No
LAVBAC300VARAC	300 cases/h	Yes	Yes
LAVBAC600	600 cases/hour	No	No
LAVBAC600VAR	600 cases/hour	Yes	No
LAVBAC600VAR	600 cases/hour	Yes	Yes



WASHING



EVOLUTION SYSTEM: NOZZLE, HOSE & HOSE HOLDER

A spray disinfection unit designed to meet the requirements of professionals in the food industry, institutional kitchens, and environments subject to strict hygiene protocols.

Equipped with a PVDF bypass venturi featuring a one-piece molded body, it ensures precise product mixing and consistent performance, with a flow rate of 12 L/min during rinsing and 8 L/min during washing.

Its design incorporates a check valve that ensures safe operation while facilitating maintenance. The perfectly smooth internal surfaces minimize limescale and chemical buildup, thereby extending the equipment's service life.

Manufactured from materials resistant to corrosion and electrolysis, the system offers excellent reliability, even in the most demanding environments.

Designed for daily use, it comes with a spray gun, a 15-meter hose, and a BDN hose holder. Its design allows the hose to be quickly wrapped around the unit, while the anti-tear clamp ensures a secure hold during use.

- High flow rate: 12 L/min for rinsing and 8 L/min for washing
- High-strength PVDF venturi bypass
- Integrated check valve for enhanced safety
- Resistant to corrosion and electrolysis
- Smooth interior surface minimizes scale buildup
- Convenient hose winding around the unit
- Anti-tear flange for better hose retention
- Delivered ready to use with a spray gun, 15-meter hose, and stand

TECHNICAL DATA

Dimensions	48 × 34 × 10.5 cm
Color	White
Operation	Manual



SHOE CABINET

HC



SHOE CABINET

Designed to accommodate boots and shoes, our industrial dryers offer a variable capacity of up to 20 pairs. Our units, which use eco-friendly ozone technology, effectively disinfect and deodorize without leaving chemical residues, while complying with health standards. Forced-air drying preserves the technical properties of PPE by removing moisture and accelerating the drying process.

Our solutions combine time savings, productivity, and comfort for your entire team.

STRUCTURE

- Suitable for shoes or clogs
- Capacity for 10, 15, and 20 pairs (5 drawers)
- Brushed 304L stainless steel construction
- Sloped Roof
- Unit comes with adjustable legs or wall mounts

Part Number	Capacity (pairs)	WxHxD (mm)	Weight (kg)	Power supply	Power consumption
HC10	10	510X2005X200	48	1X230V-10/16A-50HZ	550W
HC15	15	760X2005X200	65	1X230V-10/16A-50HZ	550W
HC20	20	990X2005X200	75	1X230V-10/16A-50HZ	1100W

OPTION



Pair numbering



BOOT DRYER

Designed to accommodate boots, shoes, thigh-high boots, and gloves, our industrial dryers offer a capacity ranging from 2 to 60 pairs. They combine drying, disinfection, and deodorization to ensure your team's comfort and safety.

Construction and Design

- Brushed 304L stainless steel construction
- Single- or double-sided tubular structure, modular and scalable
- Boot support tubes with open/closed flaps
- Washable with a high-pressure water jet or foam cannon
- Delivery options: casters, feet, or wall mounting

Drying/Disinfection/Deodorization

- Forced-air drying: quickly removes moisture while preserving the technical properties of PPE
- Disinfection and deodorization: via a germicidal lamp with eco-friendly ozone, without the addition of chemicals
- Programmable cycles: standard duration of 1 hour and 30 minutes for drying, disinfection, and deodorization

Benefits

- Eliminates up to 90% of bacteria (fungi, common bacteria...)
- No residual odors
- Eco-friendly and cost-effective: no chemicals required
- Operator comfort thanks to the heat and programmable cycles

Part Number	Capacity (pairs)	WxHxD (mm)	Weight (kg)	Power supply	Power consumption
M2	2	600X470X470	14	1X230V-10/16A-50HZ	180W
M5	5	360X1950X470	30	1X230V-10/16A-50HZ	550W
M10	10	600X1950X470	40	1X230V-10/16A-50HZ	1100W
M15	15	840X1950X470	45	1X230V-10/16A-50HZ	1100W
D20	20	690X1950X770	42	1X230V-10/16A-50HZ	1100W
D30	30	930X1950X770	48	1X230V-10/16A-50HZ	1100W
M20	20	1170X1950X770	69	1X230V-10/16A-50HZ	1300W
M30	30	1650X1950X470	80	1X230V-10/16A-50HZ	1300W
D40	40	1170X1950X770	82	1X230V-10/16A-50HZ	1300W
D60	60	1650X1950X770	105	1X230V-10/16A-50HZ	1300W

OPTIONS



Adjustable stainless steel legs for floor washing



Special tube for thigh-high boots and waders



Pair numbering



GLOVE DRYER

SECGA



GLOVE DRYER

Designed specifically for drying all types of gloves, it combines efficiency, hygiene, and comfort. Thanks to hot-air drying technology, cycles are fast and flexible, ranging from 45 minutes to 2 hours and 30 minutes, and can be programmed as needed. The unit draws in ambient air, heats it to 45°C, and then circulates it to evaporate the moisture inside the gloves. This process preserves the gloves' technical properties, even after multiple cycles, while providing optimal comfort for the operator thanks to the gentle heat.

At the same time, the glove dryer ensures effective ozone disinfection. The heated air passes through a UV-C germicidal lamp, generating ozone that eradicates up to 90% of bacteria-including fungi-while neutralizing unpleasant odors. This disinfection occurs without the addition of chemicals, making the process both eco-friendly and cost-effective.

Thus, the glove dryer clearly separates the functions: drying (hot air) and disinfection (ozone), to ensure gloves are clean, dry, and ready for use.

STRUCTURE

- Modular and scalable single- or double-sided tubular structure
- Glove support tubes with open/closed flaps
- Washable with a high-pressure Water jet or foam cannon
- Unit available with casters, legs, or wall mounting

TECHNICAL DATA

Finish	Brushed
Construction	304L Stainless Steel
Drying time	From 45 minutes to 2 hours 30 minutes
Frame	Modular: single- or double-sided tubular frame, scalable as needed

OPTIONS



Flap-style glove holders



Wall mounting



On legs



On casters



DRYING CABINET

ARM1200


COMMERCIAL DRYING CABINET

Our line of professional communal drying cabinets combines drying and disinfection to meet all your needs. Ambient air is drawn in, heated to 45 °C, and then circulated inside the cabinet to evaporate moisture from your clothing while preserving their technical properties. To ensure optimal hygiene, our cabinets are equipped with an ozone disinfection system: the heated air passes through a germicidal UV-C lamp, eliminating up to 90% of bacteria and germs while neutralizing odors without the use of chemicals. Cost-effective and eco-friendly, this system offers programmable cycles and ensures true workplace comfort, with clothing retrieved warm and ready to wear.

TECHNICAL DATA

Capacity	Up to 52 full outfits
Drying cycle	From 45 minutes to 2 hours 30 minutes
Heated air	45°C
Drying	Hot air drying
Deodorization	Chemical-free



DRYING CABINET

ARM600


COMMERCIAL DRYING CABINET PROFESSIONAL

Our line of professional communal drying cabinets combines efficient drying with thorough disinfection. Ambient air is drawn in, heated to 45 °C, and then circulated inside the cabinet to evaporate moisture from your clothing while preserving its technical properties. For optimal hygiene, our cabinets feature an ozone disinfection system that eliminates up to 90% of bacteria. The heated air passes through a germicidal UV-C lamp, disinfecting and deodorizing your equipment without the use of chemicals. Cost-effective, eco-friendly, and programmable, this system offers flexibility and convenience, with garments returned warm and ready for use.

TECHNICAL DATA

Capacity	Up to 12 complete sets
Drying cycle	From 45 minutes to 2 hours 30 minutes
Heated air	45°C
Drying	Hot air drying
Deodorization	Chemical-free






PROFESSIONAL CLEANING SUPPLIES

VIKAN PROFESSIONAL CLEANING SUPPLIES

Acinox offers a complete line of Vikan professional cleaning brushes, a global leader in hygiene and safety for sensitive environments. Designed to meet the demands of the food and beverage industry, this equipment combines cleaning efficiency, ergonomics, and durability. Each tool is designed to make your teams' work easier while minimizing the risk of contamination.

Acinox helps you choose the equipment best suited to your specific uses, on-site constraints, and regulatory requirements, with a simple goal: reliable tools that are easy to use and truly useful over the long term. Vikan's brush line stands out for its color-coding system: a simple and intuitive way to assign the right tools to each area of your facility and each risk level.

Not sure where to start? As part of our technical hygiene audit (see page 6), our Acinox experts will assess your facilities and propose a customized color coding plan aligned with your HACCP protocols.




Handles



Brooms



Squeegees



Brushes



Scrapers



Cloths



Buckets



Wall bracket

AVAILABLE COLORS:



EXPLORE OUR RANGE

Lockrooms, storage, and protections



LOCKERS	66
DISPENSERS	68
APRON HOLDERS	70
TRASH BAG HOLDERS	71
DESKS	72
BENCHES	73
TABLES	74
COMPUTER CABINETS	75
VARIOUS FURNISHINGS	76
STEP STOOLS	77
DOOR GUARDS	78
CONTINUOUS AND TUBULAR GUARDS	79
BUFFER ZONE	81





LOCKERS

ARMVE

STAINLESS STEEL LOCKERS

These models are the ideal solution for enhanced hygiene. Their design ensures continuous ventilation of the lockers. It is also possible to separate dirty clothes from clean clothes using the internal separation module.



MODULAR



HYGIENIC



SECURE

TECHNICAL DATA

Materials	- 304L stainless steel - 316L stainless steel - 441L stainless steel
Locking mechanism	- Padlockable - Key-lock
Number of Levels	1 to 4
Number of compartments	from 1 to 16
Internal dividers	Available depending on model (indicated by)

SPECIFICATIONS


Feet	ø38mm Height-adjustable x 150mmH
Ventilation	Ventilation holes

1 COLUMN



X1E1

2 LEVELS



X1E1-2

3 LEVELS



X1E1-3

4 LEVELS




X1E1-4

2 COLUMNS



X1E2



X1E2-4



X1E2-6




X1E2-8

3 COLUMNS



X1E3



X1E3-6



X1E3-9



X1E3-12

4 COLUMNS



X1E4



X1E4-8



X1E4-12



X1E4-16



LOCKERS

HYARMCAS



HPL LAMINATE LOCKERS

This line of lockers, which are more durable than stainless steel models, is made of HPL—a material that is resistant to moisture, impacts, and scratches, ensuring optimal longevity. We offer a range of lockers with a modern, sleek design, featuring customization options for colors and finishes. They blend seamlessly into any type of environment (pharmaceutical, food processing, public facilities, etc.). A wide range of colors allows you to match your company's branding. Our HPL products are made from recyclable materials and meet sustainability standards, making them an eco-friendly choice.



EASY TO
CLEAN



MODULAR



SECURE

SPECIFICATIONS

Materials	HPL
Dimensions (W x D x H)*	Width (per section): 30 – 35 – 40 – 50 cm . <i>The width varies depending on the number of columns selected</i> . Depth: 50 cm. Height: 200 cm

CONFIGURATION

Number of compartments	From 1 to 36 compartments
Locking System	- Key - Snap lock - Bolt - Burglar-proof bolt - Keypad - Combination lock - Coin
Back	- Standard - Milled bottom - Stainless steel bottom
Top	- Flat - Sloped
Feet	- Stainless steel base - Aluminum base - Adjustable stainless steel base (13 to 20 cm)

2 lockers	
3 compartments	
4 compartments	
6 compartments	
9 compartments	
10 compartments	
12 compartments	
18 compartments	
36 compartments	

COLORS

048 ESSE	180 ESSE	U31 ESSE	682 ESSE	159 ESSE	450 ESSE	001 ESSE	640 ESSE	564 ESSE	583 ESSE	...

OPTIONS

Fixed or movable built-in bench	Milled doors	Sloped roof	Modular interior (shelves)


Get answers to all your questions at 02 52 20 20 55 or information@acinox.fr

The examples shown above are not exhaustive. There are countless other possibilities; anything is imaginable and customizable to meet your needs and preferences.




DISPENSERS


DISTRIBLOUS
GOWN DISPENSER

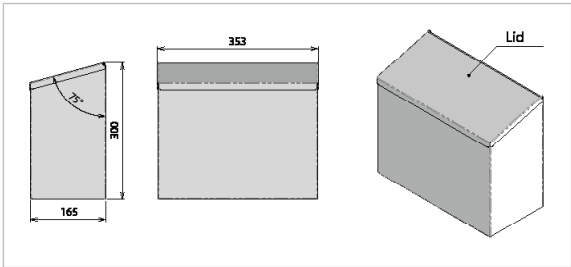


DISTRIMAC
BULK DISPENSER WITH
FALL-ARREST MEMBRANE
ANTI-FALL.
E.G., HAIRNETS, GLOVES,
BEARD COVERS...

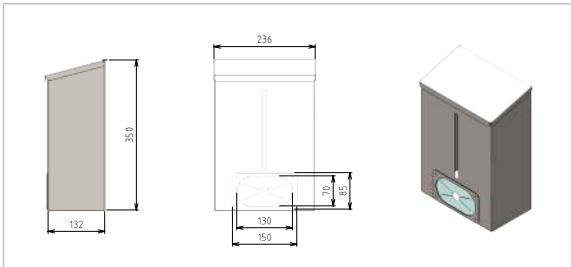

DSL
SOAP DISPENSER

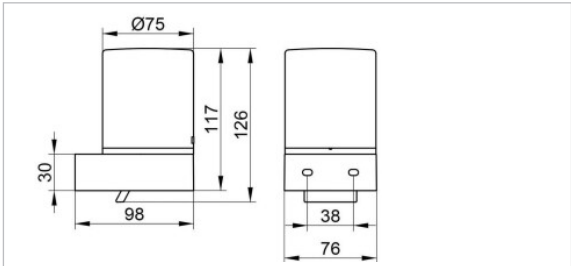

DSL STAINLESS STEEL
SOAP DISPENSER
STAINLESS STEEL

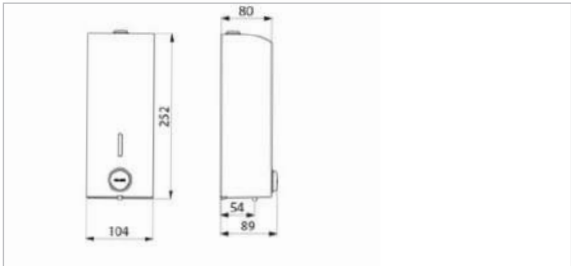



SHOE COVER DISPENSER

The shoe cover dispenser is a practical and quiet mechanical device that allows for quick and easy dispensing of single-use shoe covers. With a capacity of up to 200 shoe covers, it ensures optimal hygiene and can be installed in a variety of environments. It is easy to maintain and compatible with industrial cleaning products.

- Fully mechanical operation, no electricity required
- Very quiet operation
- Ergonomic handle for improved stability
- Excellent stability
- Can be installed in most spaces
- Easy to use, even for beginners
- Compatible with 7 different models of shoe covers
- Improves cleanliness and hygiene
- Storage capacity: up to 200 single-use shoe covers
- Quick and easy to refill
- Easy to maintain; compatible with industrial cleaning products

TECHNICAL DATA

Colors	Grey and white
Capacity	200
Dimensions	89 x 32 x 75 cm
Weight	17 kg

OUR SHOE COVERS



NON-WOVEN SHOE COVERS WITH ELASTIC BAND

Material	polypropylene
Weight	6 g
Environment	Dry and slippery



NON-WOVEN ANTI-SLIP SHOE COVERS

Material	polypropylene
Weight	6 g
Environment	Dry and slippery



NON-WOVEN SHOE COVERS WITH CPE COATING

Material	polypropylene
Weight	11 g
Environment	Dry, wet, slippery and greasy



POLYETHYLENE CHLORIDE SHOE COVERS

Material	polyethylene chloride
Weight	5,5 g
Environment	Dry, wet and slippery



NON-WOVEN SHOE COVERS

Material	polyethylene
Weight	6 g
Environment	Dry



POLYETHYLENE SHOE COVERS

Material	polyethylene
Weight	3 g
Environment	Dry, wet and slippery



APRON HOLDERS

RANGT



RANGE WALL-MOUNTED APRON

TECHNICAL DATA

Construction	304L stainless steel
Number of hangers	10 hangers/meter

QUANTITY

Capacity	Total length	Part Number
10 items	1050 m	RANGT10
15 items	1500 m	RANGT15
20 positions	1950 m	RANGT20

RANGTP



FREESTANDING APRON RACK

TECHNICAL DATA

Construction	304L stainless steel
Number of hangers	10 hangers/meter

QUANTITY

Capacity	Total length	Part Number
10 items	900 m	RANGTP10
15 items	1300 m	RANGTP15
20 positions	1700 m	RANGTP20



TRASH BAG HOLDERS



WALL-MOUNTED STAND

SSPM

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Bag capacity	50L - Ø 350mm
Locking mechanism	With elastic band

OPTIONS



Lid



FREE-STANDING STAND

SSPP

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Bag capacity	100L - Ø 350mm
Locking mechanism	With elastic band

OPTIONS



On casters


Double
stainless steel
strapping


With lid



COUNTERS



WALL-MOUNTED CONSOLE

PUPM

TECHNICAL DATA

Construction	304L stainless steel
Configuration	Wall-mounted



FREESTANDING CONSOLE

PUPP

TECHNICAL DATA

Construction	304L stainless steel
Configuration	Freestanding

OPTIONS



Lower shelves



Lectern on casters



Low cabinet option



BENCHES



CUSTOM BENCHES

BANC

TECHNICAL DATA

Construction	304L stainless steel
Mounting	Freestanding
Standard lengths	1000 mm, 1500 mm, or 2000 mm



HPL BENCHES

HYBAN

TECHNICAL DATA

Dimensions	L: 1000, 1500, or 2000 mm
	H: 460 mm
	W: 410 or 820 mm
Feet	Adjustable, stainless steel



TABLES



LIGHTWEIGHT TABLE

TABLEG

TECHNICAL DATA

30x30 mm tubular frame

2 mm-thick stainless steel top with internal gusset > 800 mm

Adjustable ABS legs: +/-20 mm

Load Capacity

OPTION : casters



HEAVY-DUTY TABLE

TABLOU

TECHNICAL DATA

40x40 mm tubular frame + tubular reinforcement under the tabletop

2mm-thick stainless steel tabletop

Adjustable legs, Ø60 ±50 mm

OPTION : casters



HDPE TABLE

PEHD TABLOP

TECHNICAL DATA

40x40 mm tubular frame + tubular reinforcement under the tabletop

20 mm thick HDPE tabletop

Adjustable legs, Ø60 ±50 mm

OPTION : casters



CUSTOM-MADE TABLE

CUSTOM

OPTIONS

Drawers

Shelves

Footrests



COMPUTER CABINETS



STANDARD CABINET

ARMOIRE

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Interior Features	1 fixed shelf 1 sliding shelf Cable gland for electrical cable Door seal

Specific



CUSTOM CABINET

OPTIONS


- Partial-extension drawers with stainless steel slides
- 3mm-thick MAKROLON AR glass
- Top and bottom ventilation grilles, 92x92.
- Stainless steel adjustable legs + floor mounting brackets
- Gas struts with 100° opening for all cabinet types



VARIOUS FURNISHINGS

**HOSE HOLDER****SUPTUY****TECHNICAL DATA**

Construction	304L stainless steel
Overview	Micro-beaded
Capacity	20 to 25 m of hose
Option	Large size

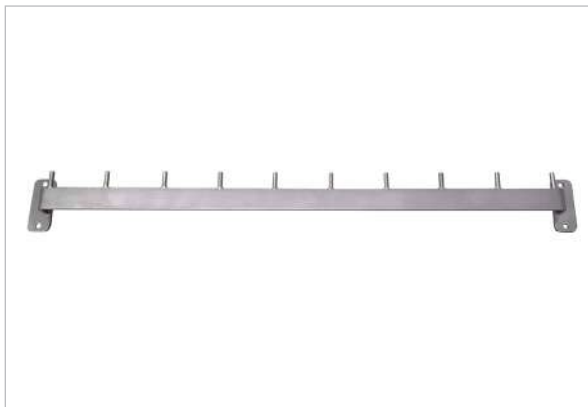**WALL-MOUNTED
COAT HOOKS****PATER****TECHNICAL DATA**

Construction	304L stainless steel
Overview	Micro-beaded
Capacity	5, 10, 15, or 20 hooks
Length	1000, 1500, or 2000 mm

**SHOE RACK OR
BOOT RACK****RS or RB****TECHNICAL DATA**

Construction	304L stainless steel
Overview	Micro-beaded
Capacity	10, 15, or 20 positions
Length	1000, 1500, or 2000 mm
Mounting	Wall-mounted or freestanding

TYPES

Construction	Number of pairs	H x D	Length
4 tiers	4, 8, 12, 16, 20, 24, 28, 32, 36, or 40	1250 x 430	from 690 to 1940 mm
5 tiers	5, 10, 15, 20, 25, 30, 35, or 40	1850 x 350	350 mm
Extension legs		1250x540 mm	

Please contact us for your specific requests




STEP STOOLS

ADJUSTABLE STEPS

MPR

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Adjustment	from 200 to 400 mm

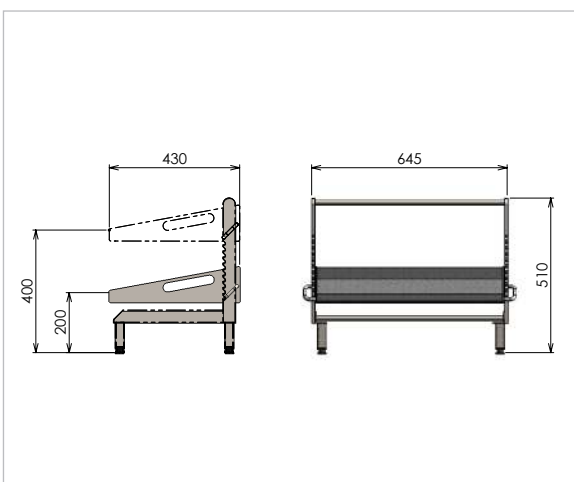


FIXED FOOTRESTS

MPF

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded

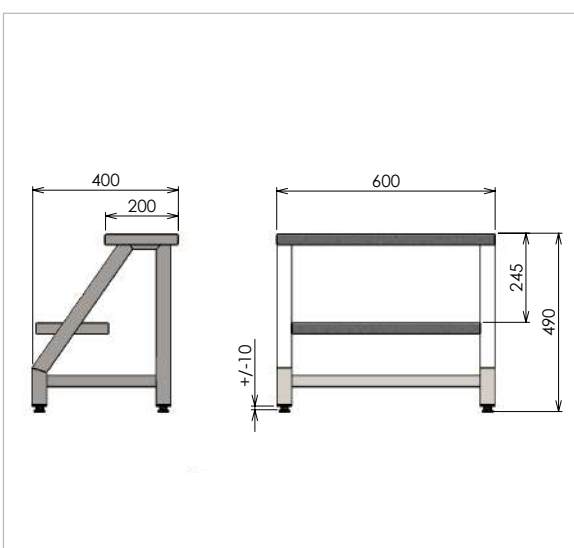



DOOR GUARDS


DOOR GUARD

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Mounting	Mounted on a plate or with a cutout

PTEP

1 point




PTEC


1 point





2 points




3 points

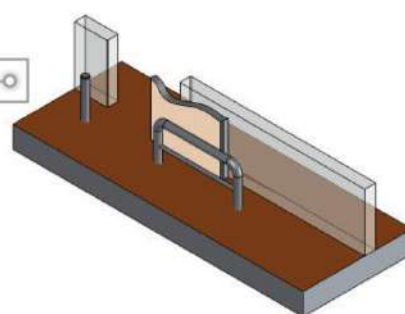

4 points



5 points

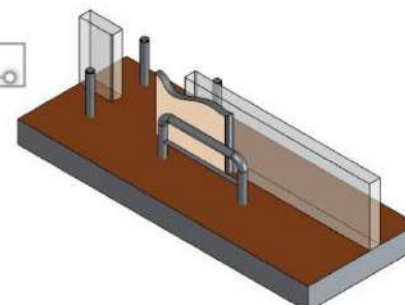



CONTINUOUS AND TUBULAR GUARDS

PTHP

CONTINUOUS PROTECTION

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Mounting	On a base plate or removable base plate
Option	- with fixed shelf - with removable shelf



PHHP

HYGIENIC PROTECTION

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Mounting	On a base plate or for wall mounting




PORT

GATE

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Mounting	On a base plate or for wall mounting
Standard lengths	750mm, 900mm, 1000mm
Gate Types	Padlockable Foot-operated With electric strike Custom-made

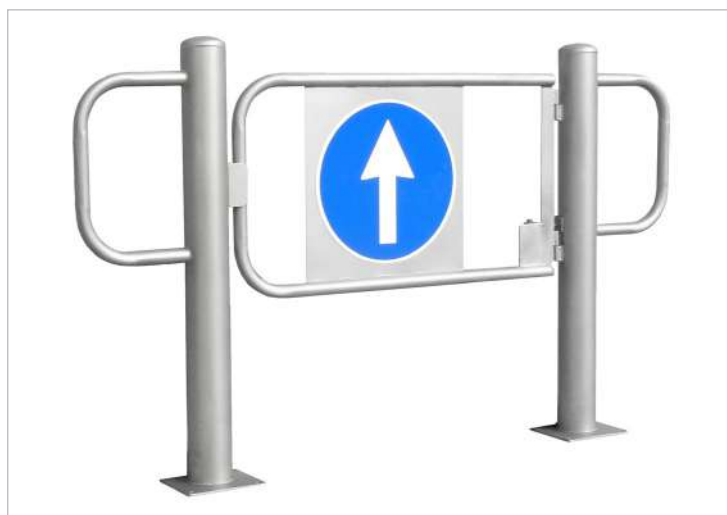



CONTINUOUS AND TUBULAR GUARDS

PORT

GATE WITH PANIC BAR

TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Mounting	On a base plate or for wall mounting
Standard lengths	750mm, 900mm, 1000mm
Gate Types	Padlockable Foot-operated With electric strike Custom-made




PORT

FULL-HEIGHT GATE


TECHNICAL DATA

Construction	304L stainless steel
Overview	Micro-beaded
Mounting	On a base plate or for wall mounting
Standard lengths	750mm, 900mm, 1000mm
Gate Types	Padlockable Foot-operated With electric strike Custom-made

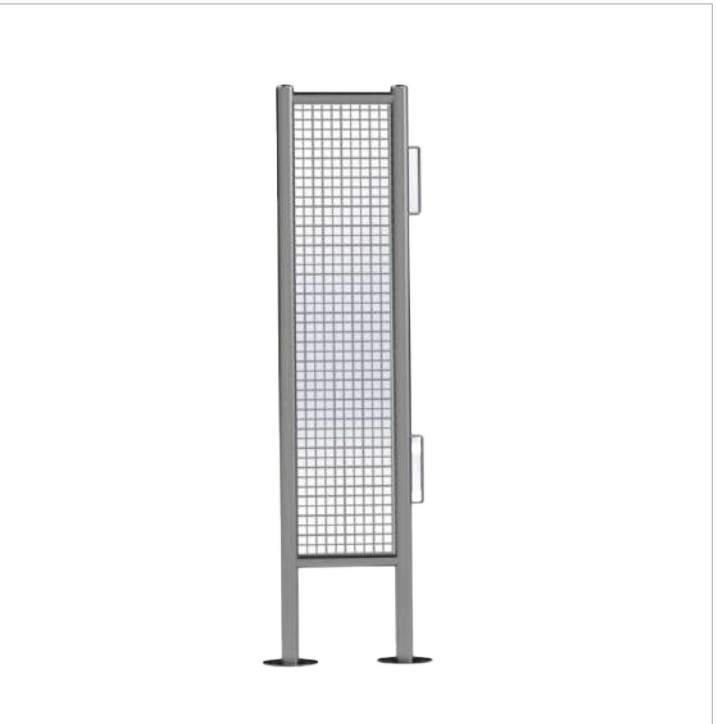



BUFFER ZONE

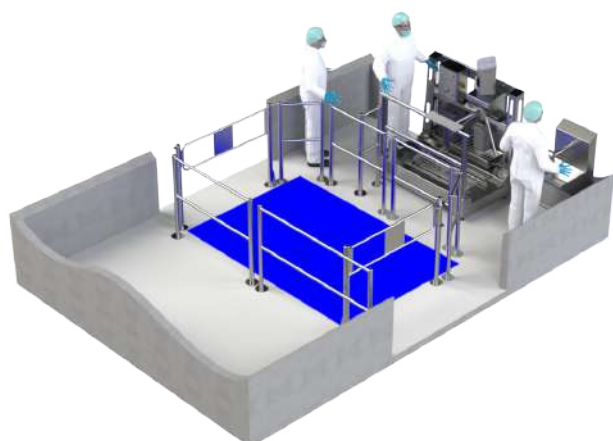

BUFFER ZONE

COMPLETE HYGIENE AIRLOCK FOR OPERATORS AND EQUIPMENT

The Sanypass buffer zone is designed to ensure optimal hygiene in sensitive areas by allowing operators to pass through with carts, trolleys, or equipment that cannot fit through a standard shoe washer. The system combines a compact hygiene airlock with a hand wash station, a handle disinfectant (Destrip), and a dedicated buffer zone.

This comprehensive airlock ensures dual disinfection:

- **For operators:** mandatory passage through a hygiene airlock.
- **For wheeled equipment:** the buffer zone, equipped with a Sanypass floor, disinfects the wheels using a system of rotating brushes and a mixture of water and detergent solution. At least three passes are required to ensure optimal disinfection.

EQUIPMENT



Sanypass



Gate



Compact
airlock

Two turnstiles equipped with magnetic strips (electronic locks) control entry and exit. The operator must press a button at the entrance and then another at the exit to ensure that the cart passes completely through the disinfection zone.

- **Effective in both directions:** the system works on both the outward and return trips, ensuring continuous protection.
- **Enhanced bacterial protection:** total control over disinfection to meet the strictest hygiene requirements.

Handling & Lifting



TILTING DEVICES
PALOX TIPPER
LIFTS - TIPPERS
ROTARY TABLES
STAINLESS STEEL EURO CONTAINERS
BE TRACT

83
85
87
88
89
90



Our maintenance contract ensures the proper operation and reliability of your equipment, allowing your teams to focus on essential tasks. Hygiene, material handling, and lifting equipment are eligible for the maintenance contract. For more information, please see page 5 of the catalog.





STANDARD 30° EURO-PAN TILTING MECHANISM

CAPACITY: 300 KG

Acinox container tilters, featuring a tubular frame, are designed to empty 200-liter or 300-liter Euro containers up to 1,200 mm in height. Made entirely of stainless steel, they are corrosion-resistant-including the oversized lifting cylinder-and feature a hydraulic system with anti-drop safety. Easy to transport and handle, they take up minimal floor space, support 300 kg, are compatible with both container sizes, can be configured with two-hand control, and can be equipped with an adaptable chute.

TECHNICAL DATA

Construction	304L stainless steel tubing
Finish	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	1,1 Kw
Lifting	Double-acting hydraulic cylinder powered by a hydraulic power unit

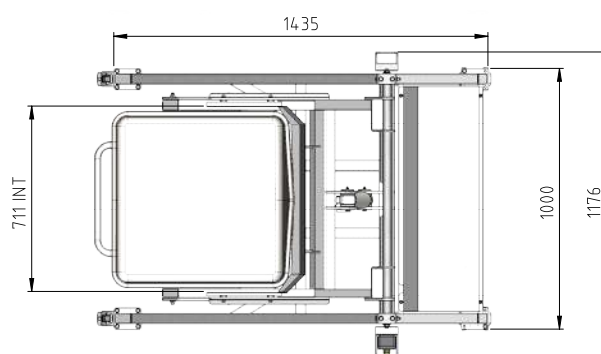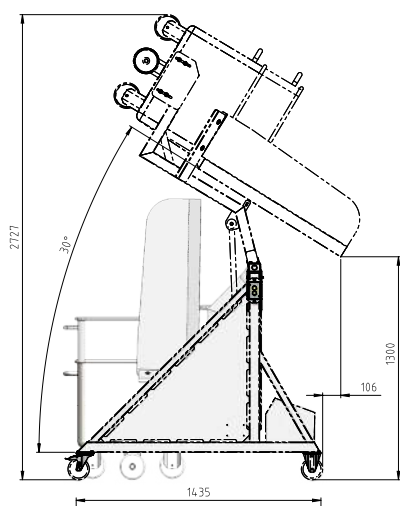

OPTIONS

316 L

316L stainless steel



Enclosed mesh guard with secure access door



Custom chute



Two-hand control



TILTING DEVICES

BASCBE 30R



30° EURO-PALLET TIPPER (WITHOUT HOLLOW BODY)

CAPACITY: 400 KG



Acinox container tilters are designed to empty the contents of standard 200L or 300L Euro containers at a height of 1,200 mm.

Their all-stainless-steel construction provides excellent corrosion resistance, including for the oversized lifting cylinder.

The hydraulic tilting system is equipped with a fall-arrest safety feature.

TECHNICAL DATA

Construction	Stainless steel sheet, thickness . 5 mm
Finish	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	1,1 Kw
Lifting	Double-acting hydraulic cylinder powered by a hydraulic power unit

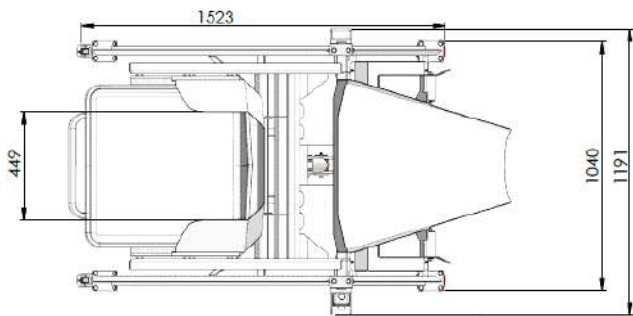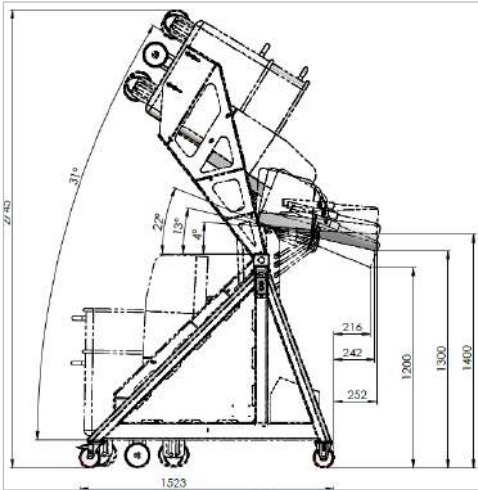

OPTIONS



316L stainless steel



Caster-mounted configurations



Custom chute



Two-hand control



Enclosed mesh guard with secure access door



PALOX TIPPER

BASCPA




PALOX TIPPER

600 KG

Acinox container and Palox tippers, featuring a solid tubular frame, are designed to empty 200-L or 300-L Euro containers and 600 kg Palox containers of various sizes at a height ranging from 900 mm to 1,200 mm. Their all-stainless-steel construction ensures excellent corrosion resistance, facilitates cleaning for hygienic use, and incorporates a lifting system with a safety mechanism to prevent falls. These machines are portable, easy to handle, and have a small footprint.

Some models can also be equipped with safety enclosures featuring an access door and require a minimum ceiling height of 3,400 mm. Lifting and lowering are achieved by holding down the control buttons for precise control.

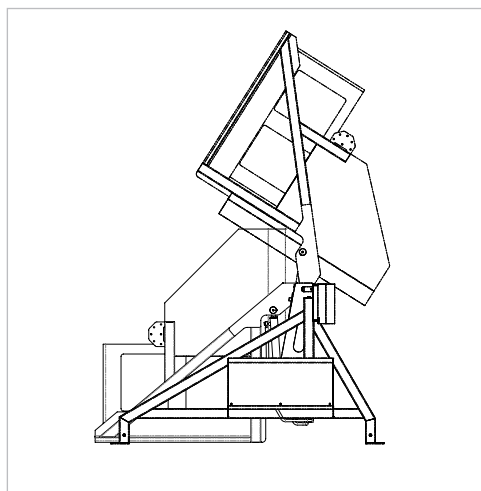

TECHNICAL DATA

Construction	304L stainless steel tubing
Finishes	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	2,2 Kw
Max. total load	600 Kg
Lifting	Double-acting hydraulic cylinder powered by a hydraulic power unit

OPTIONS



316L stainless steel



Side loading of the bin



Chute



Two-hand control



Enclosed mesh guard with secure access door



MANUAL TIPPER FOR CLEANING THE BINS

BASCM




MANUAL TIPPER FOR CLEANING THE BINS

Facilitates the cleaning of 200-liter and 300-liter Euro containers by tilting them up to 90°.

TECHNICAL DATA

Construction	304L stainless steel
Edge	Rolled and welded with reinforcement
Optional	• 200-liter Euro container
	• 300L Euro container

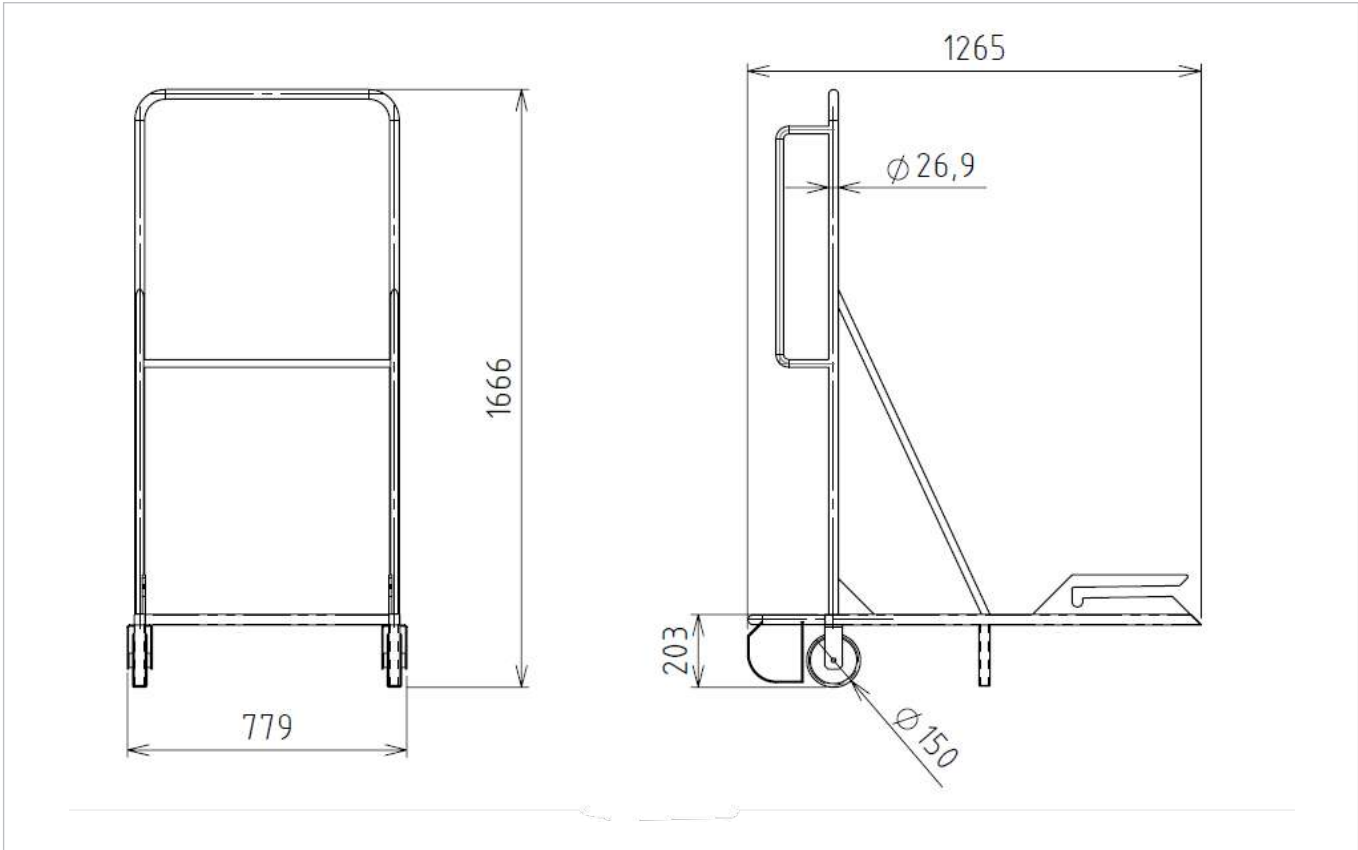




LIFT-AND-TILT UNIT FOR EURO CONTAINERS

Designed for the safe handling and emptying of bins and pallet boxes weighing up to 350 kg, this lift-and-tilt unit ensures fast, ergonomic, and reliable operations. Compact and robust, it adapts to all types of environments: food processing, pharmaceutical, or industrial. It is compatible with 120-, 130-, 200-, and 300-liter Euro containers (DIN 9797) and features an adjustable discharge height ranging from 900 to 2,525 mm. Its stainless steel construction ensures excellent corrosion resistance, even in demanding environments. The system is fully configurable to meet your needs:

- Forks available in straight arm, 90° right arm, left arm, or 90° left arm configurations
- Straight or inclined chutes (right, left, or on both sides), with specific options for liquids
- Fixed or mobile chassis for greater flexibility
- Open or closed safety cage
- Integrated two-hand control, remote control panel, and anti-fall safety system

Easy to transport and with a small footprint, this tilting lift integrates easily into existing production lines. A reliable, modular solution designed for real-world use that adapts to your constraints rather than the other way around.

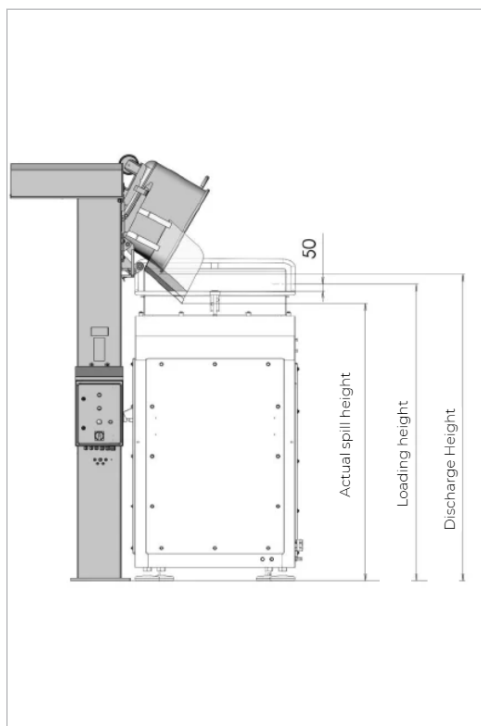

OPTIONS

Construction	304L stainless steel tubing
Finishes	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	2,2 Kw



LEARN MORE



ROTARY TABLES

TT



ROTARY TABLES

Acinox turntables allow for the accumulation of products from one or more conveyors. Designed for collection, accumulation, or sorting by one or more operators, they are available in several finish levels.

TECHNICAL DATA

Construction	Fabricated from 304L stainless steel
Finish	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	0.37 kW 23 rpm
Drive	Gear motor driving a friction roller beneath the turntable

DIMENSIONS

Table diameter in mm	Rotational speed of the turntable	Stainless steel turntable	Turntable HDPE
1000	3.5 rpm	TTPI100	TTPP100
1200	3.5 rpm	TTPI120	TTPP120
1500	3.5 rpm	TTPI150	TTPP150

Turntable, 1000 mm diameter, with HDPE platter

Ø1000 turntable with stainless steel platter

OPTIONS

Deflector

Fixed base

HDPE tabletop

Variable speed drive

Openwork edge



STANDARD EURO CONTAINERS

TECHNICAL DATA

Construction	Stainless steel sheet, thickness . 20/10 mm
Finish	Pickled and passivated
Edge	Rolled and welded with reinforcement
Bottom	Reinforced with 3 sheet metal
Weight	According to DIN standard: 40 kg $\pm$ 100 g for a 200-liter container

OPTIONS



Container lid





Removable offset handle for container





Manual tipper for cleaning the bins



BE120



BE200



BE300



Carrying handle



Lid



Drain valve



Cart for 15 lids



BE TRACT

BE TRACT



BE TRACT

Be Tract is an innovative solution developed by ACINOX to optimize internal logistics in industrial, production, and storage environments. Made of pickled-and-passivated 304L stainless steel, this robust and durable device allows for the easy coupling of multiple Euro bins to form a smooth, stable, and secure handling train.

Thanks to its quick-connect, tool-free system, Be Tract simplifies movement operations, reduces manual effort, and significantly improves material handling flows.

Quick and intuitive connection : no tools required.

Improved productivity: reduction in travel distances and handling time.

Enhanced safety: screw-lock on front and rear clevises.

Optimized mobility: smooth movement throughout workshops, order-picking areas, or warehouses.

Modular solution: allows you to create custom container trains tailored to your needs.



TECHNICAL DATA

Construction	304L stainless steel
Finish	Pickled and passivated
Overview	Microblasted



HYGIENIC DESIGN FOOD SOLUTIONS



Acemia
INNOVATIVE FOOD SOLUTIONS



Acinox
HYGIENIC SOLUTIONS



Axinova
ROBOTIC SOLUTIONS



Celtech
DOSING SOLUTIONS



Comea
process
ENGINEERING FOOD ASSEMBLY



Multi-Fill
FOOD FILLING SOLUTIONS



velec
systems
HIGH SPEED COUNTING,
LOADING & PACKING SOLUTIONS



AVAILABLE
INTERNATIONALLY



+ 10,000
SATISFIED
CUSTOMERS



CUSTOM DESIGN



60 YEARS OF
EXPERIENCE



CUSTOMIZABLE
24 HOURS



CONTACT US FOR MORE INFORMATION



5 Rue du Progrès, 44140 GENESTON, France



+33 (0) 2 52 20 20 55 (switchboard)



+33 (0) 7 59 67 86 30 (Technical Hotline)



information@acinox.fr

ACINOX - SIRET: 90071358700021

Any representation or reproduction, in whole or in part, of this document without the consent of Acinox is prohibited. The same applies to translation, adaptation, transformation, arrangement, or reproduction by any means or process whatsoever (Articles L.122-4 and L.122-5 of the Intellectual Property Code). Photo credits: ©Acinox - April 2026 - Acinox Catalog