

Handling & Lifting



TILTING DEVICES
PALOX TIPPER
LIFTS - TIPPERS
ROTARY TABLES
STAINLESS STEEL EURO CONTAINERS
BE TRACT

83
85
87
88
89
90



Our maintenance contract ensures the proper operation and reliability of your equipment, allowing your teams to focus on essential tasks. Hygiene, material handling, and lifting equipment are eligible for the maintenance contract. For more information, please see page 5 of the catalog.





STANDARD 30° EURO-PAN TILTING MECHANISM

CAPACITY: 300 KG

Acinox container tilters, featuring a tubular frame, are designed to empty 200-liter or 300-liter Euro containers up to 1,200 mm in height. Made entirely of stainless steel, they are corrosion-resistant-including the oversized lifting cylinder-and feature a hydraulic system with anti-drop safety. Easy to transport and handle, they take up minimal floor space, support 300 kg, are compatible with both container sizes, can be configured with two-hand control, and can be equipped with an adaptable chute.

TECHNICAL DATA

Construction	304L stainless steel tubing
Finish	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	1,1 Kw
Lifting	Double-acting hydraulic cylinder powered by a hydraulic power unit

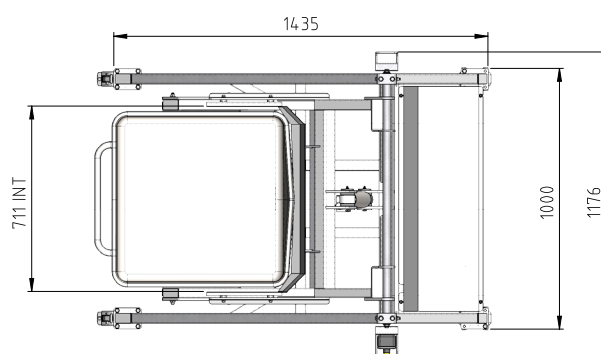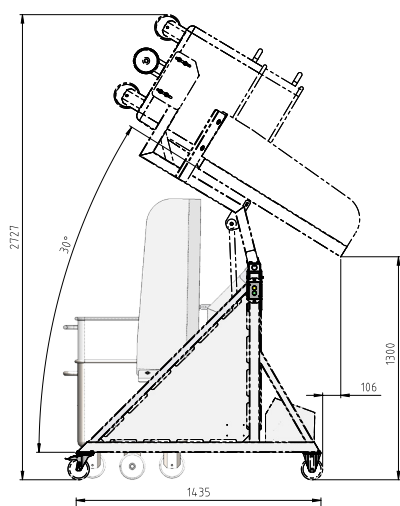

OPTIONS

316 L

316L stainless steel



Enclosed mesh guard with secure access door



Custom chute


Photo non disponible

Two-hand control



TILTING DEVICES

BASCBE 30R

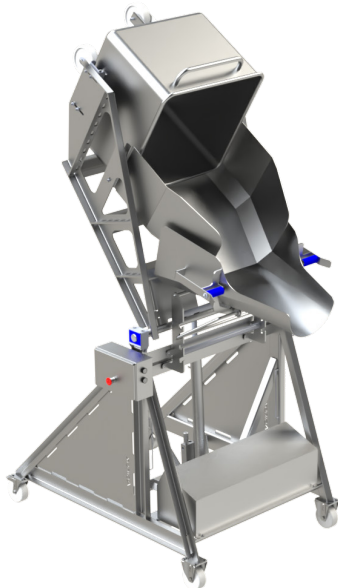

30° EURO-PALLET TIPPER (WITHOUT HOLLOW BODY)

CAPACITY: 400 KG



Acinox container tilters are designed to empty the contents of standard 200L or 300L Euro containers at a height of 1,200 mm.

Their all-stainless-steel construction provides excellent corrosion resistance, including for the oversized lifting cylinder.

The hydraulic tilting system is equipped with a fall-arrest safety feature.

TECHNICAL DATA

Construction	Stainless steel sheet, thickness . 5 mm
Finish	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	1,1 Kw
Lifting	Double-acting hydraulic cylinder powered by a hydraulic power unit

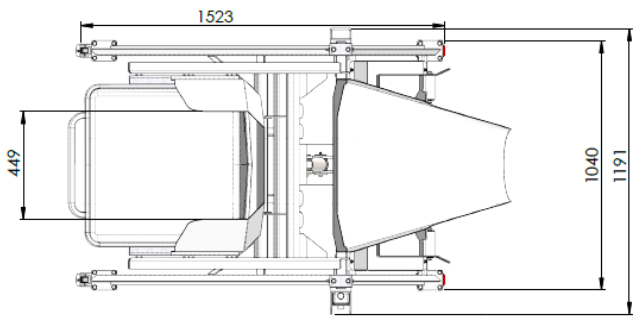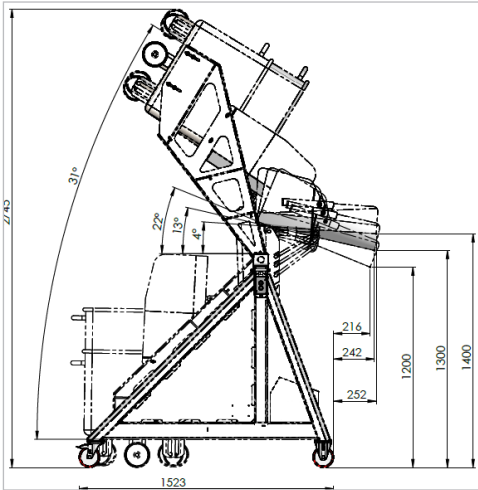

OPTIONS



316L stainless steel



Caster-mounted configurations



Custom chute



Two-hand control



Enclosed mesh guard with secure access door



PALOX TIPPER

BASCPA




PALOX TIPPER

600 KG

Acinox container and Palox tippers, featuring a solid tubular frame, are designed to empty 200-L or 300-L Euro containers and 600 kg Palox containers of various sizes at a height ranging from 900 mm to 1,200 mm. Their all-stainless-steel construction ensures excellent corrosion resistance, facilitates cleaning for hygienic use, and incorporates a lifting system with a safety mechanism to prevent falls. These machines are portable, easy to handle, and have a small footprint.

Some models can also be equipped with safety enclosures featuring an access door and require a minimum ceiling height of 3,400 mm. Lifting and lowering are achieved by holding down the control buttons for precise control.

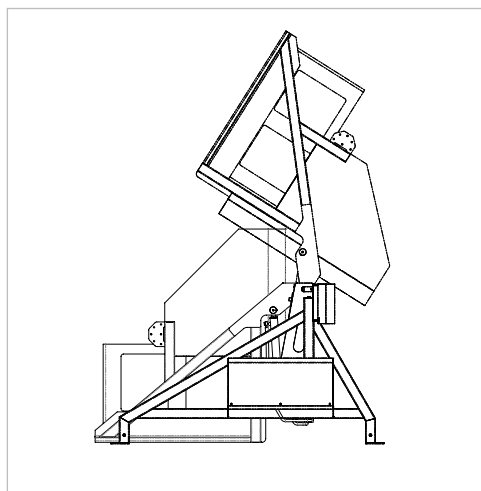

TECHNICAL DATA

Construction	304L stainless steel tubing
Finishes	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	2,2 Kw
Max. total load	600 Kg
Lifting	Double-acting hydraulic cylinder powered by a hydraulic power unit

OPTIONS



316L stainless steel



Side loading of the bin



Chute



Two-hand control



Enclosed mesh guard with secure access door



MANUAL TIPPER FOR CLEANING THE BINS

BASCM




MANUAL TIPPER FOR CLEANING THE BINS

Facilitates the cleaning of 200-liter and 300-liter Euro containers by tilting them up to 90°.

TECHNICAL DATA

Construction	304L stainless steel
Edge	Rolled and welded with reinforcement
Optional	• 200-liter Euro container
	• 300L Euro container

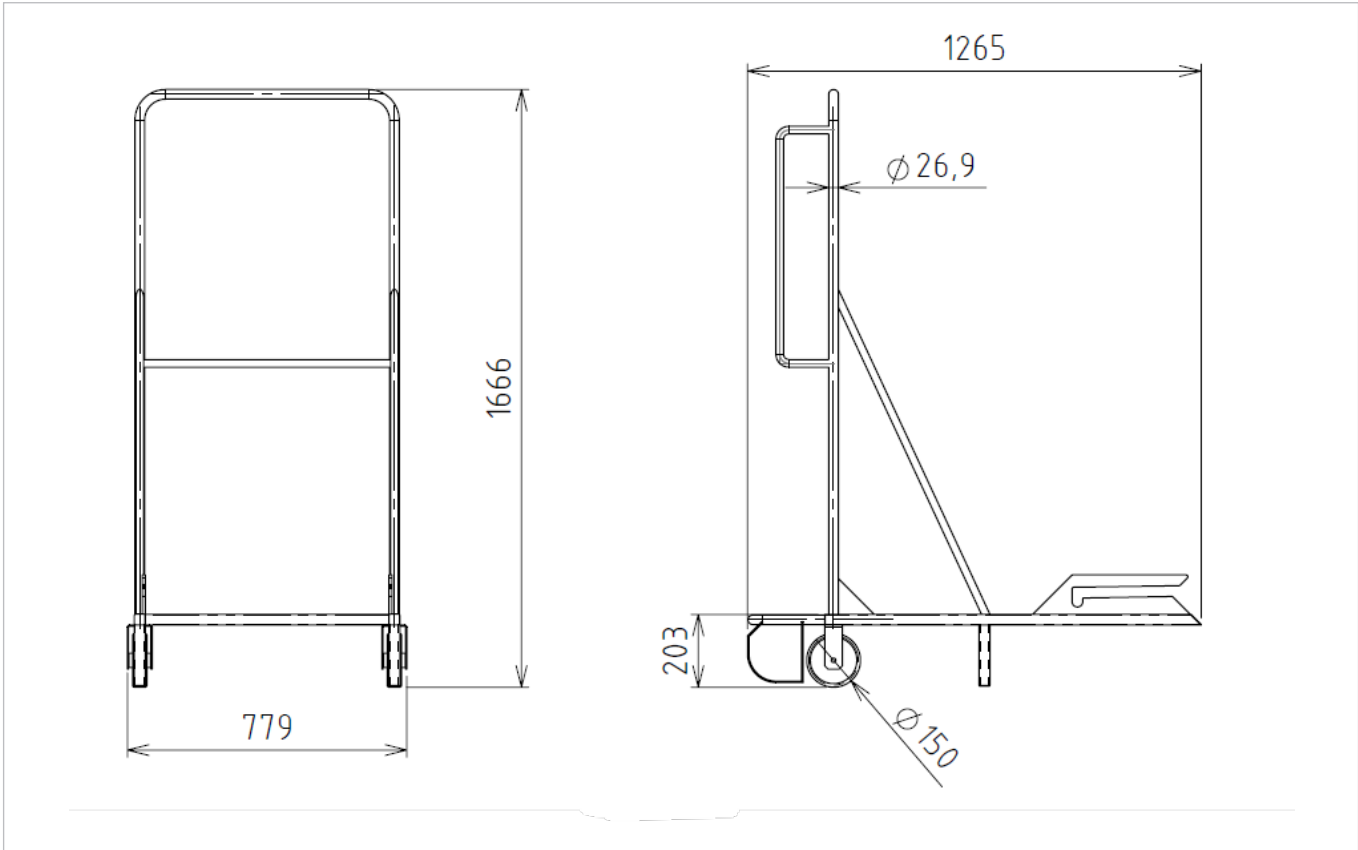




LIFT-AND-TILT UNIT FOR EURO CONTAINERS

Designed for the safe handling and emptying of bins and pallet boxes weighing up to 350 kg, this lift-and-tilt unit ensures fast, ergonomic, and reliable operations. Compact and robust, it adapts to all types of environments: food processing, pharmaceutical, or industrial. It is compatible with 120-, 130-, 200-, and 300-liter Euro containers (DIN 9797) and features an adjustable discharge height ranging from 900 to 2,525 mm. Its stainless steel construction ensures excellent corrosion resistance, even in demanding environments. The system is fully configurable to meet your needs:

- Forks available in straight arm, 90° right arm, left arm, or 90° left arm configurations
- Straight or inclined chutes (right, left, or on both sides), with specific options for liquids
- Fixed or mobile chassis for greater flexibility
- Open or closed safety cage
- Integrated two-hand control, remote control panel, and anti-fall safety system

Easy to transport and with a small footprint, this tilting lift integrates easily into existing production lines. A reliable, modular solution designed for real-world use that adapts to your constraints rather than the other way around.

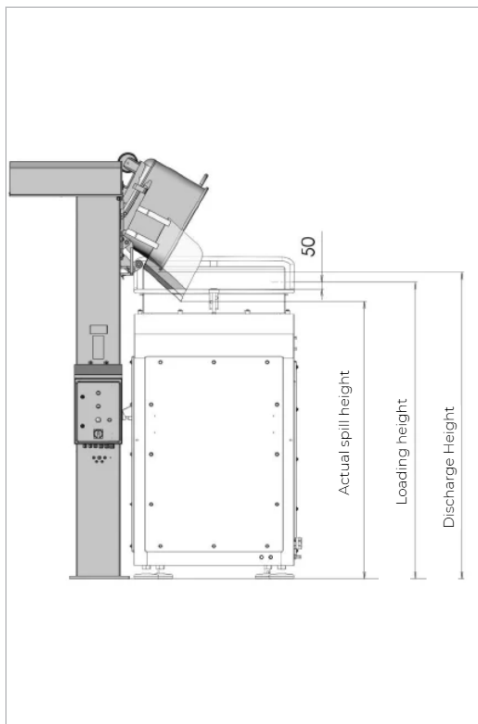

OPTIONS

Construction	304L stainless steel tubing
Finishes	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	2,2 Kw



LEARN MORE



ROTARY TABLES

TT



ROTARY TABLES


Acinox turntables allow for the accumulation of products from one or more conveyors. Designed for collection, accumulation, or sorting by one or more operators, they are available in several finish levels.

TECHNICAL DATA

Construction	Fabricated from 304L stainless steel
Finish	Pickled and passivated
Power Supply	400V/50Hz 3P+T
Power	0.37 kW 23 rpm
Drive	Gear motor driving a friction roller beneath the turntable

DIMENSIONS

Table diameter in mm	Rotational speed of the turntable	Stainless steel turntable	Turntable HDPE
1000	3.5 rpm	TTP1100	TTPP100
1200	3.5 rpm	TTP1120	TTPP120
1500	3.5 rpm	TTP1150	TTPP150

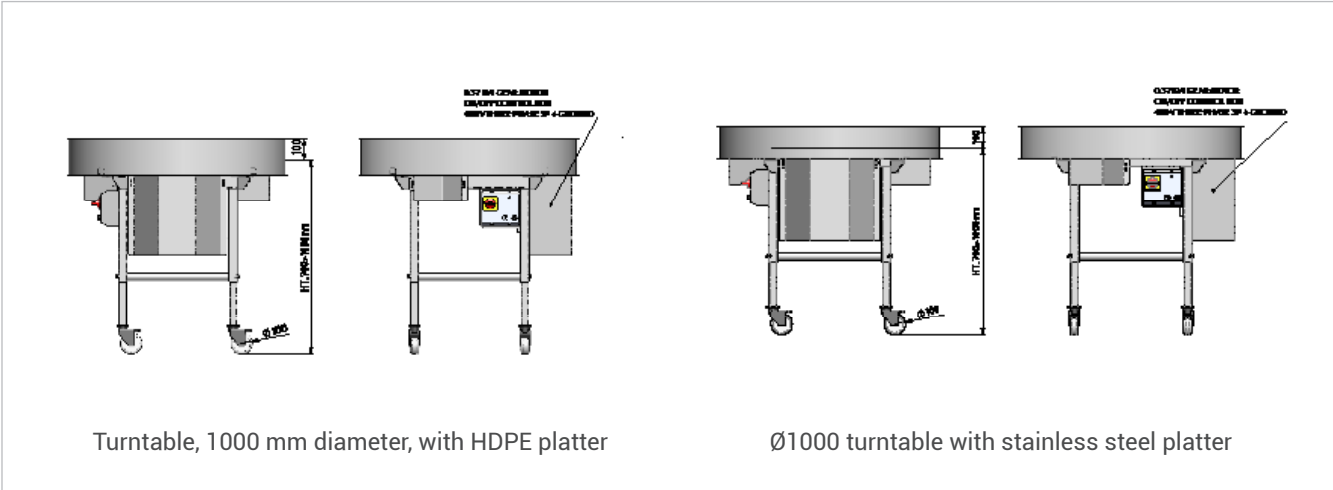

OPTIONS



Deflector Fixed base HDPE tabletop Variable speed drive Openwork edge



STANDARD EURO CONTAINERS

TECHNICAL DATA

Construction	Stainless steel sheet, thickness . 20/10 mm
Finish	Pickled and passivated
Edge	Rolled and welded with reinforcement
Bottom	Reinforced with 3 sheet metal
Weight	According to DIN standard: 40 kg ± 100 g for a 200-liter container

OPTIONS



Container lid





Removable offset handle for container





Manual tipper for cleaning the bins



BE120



BE200



BE300



Carrying handle



Lid



Drain valve



Cart for 15 lids



BE TRACT

BE TRACT



BE TRACT

Be Tract is an innovative solution developed by ACINOX to optimize internal logistics in industrial, production, and storage environments. Made of pickled-and-passivated 304L stainless steel, this robust and durable device allows for the easy coupling of multiple Euro bins to form a smooth, stable, and secure handling train.

Thanks to its quick-connect, tool-free system, Be Tract simplifies movement operations, reduces manual effort, and significantly improves material handling flows.

Quick and intuitive connection : no tools required.

Improved productivity:reduction in travel distances and handling time.

Enhanced safety: screw-lock on front and rear clevises.

Optimized mobility: smooth movement throughout workshops, order-picking areas, or warehouses.

Modular solution: allows you to create custom container trains tailored to your needs.



TECHNICAL DATA

Construction	304L stainless steel
Finish	Pickled and passivated
Overview	Microblasted



HYGIENIC DESIGN FOOD SOLUTIONS



Acemia
INNOVATIVE FOOD SOLUTIONS



Acinox
HYGIENIC SOLUTIONS



Axinova
ROBOTIC SOLUTIONS



Celtech
DOSING SOLUTIONS



Comea
process
ENGINEERING FOOD ASSEMBLY



Multi-Fill
FOOD FILLING SOLUTIONS



velec
systems
HIGH SPEED COUNTING,
LOADING & PACKING SOLUTIONS



AVAILABLE
INTERNATIONALLY



+ 10,000
SATISFIED
CUSTOMERS




CUSTOM DESIGN



60 YEARS OF
EXPERIENCE



CUSTOMIZABLE
24 HOURS

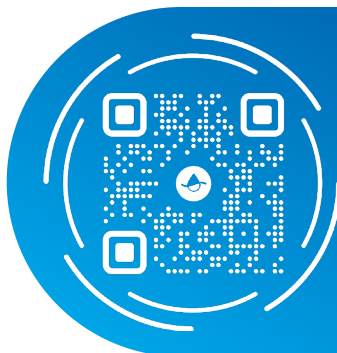

CONTACT US FOR MORE INFORMATION



5 Rue du Progrès, 44140 GENESTON, France



+33 (0) 2 52 20 20 55 (switchboard)



+33 (0) 7 59 67 86 30 (Technical Hotline)



information@acinox.fr

ACINOX - SIRET: 90071358700021

Any representation or reproduction, in whole or in part, of this document without the consent of Acinox is prohibited. The same applies to translation, adaptation, transformation, arrangement, or reproduction by any means or process whatsoever (Articles L.122-4 and L.122-5 of the Intellectual Property Code). Photo credits: ©Acinox - April 2026 - Acinox Catalog